

# ESE 2020

## Paper-2

Mechanical Engineering

Questions



## MECHANICAL-ENGINEERING-ESE-2020

1. The time taken to face a workpiece of 80 mm diameter for the spindle speed of 90 rpm and cross feed 0.3 mm/rev will be  
 A. 4.12 min                      B. 3.24 min  
 C. 2.36 min                      D. 1.48 min
2. A feed  $f$  for the lathe operation is  
 A.  $\frac{N}{L \times T_m}$  mm/rev                      B.  $\frac{L}{N \times T_m}$  mm/rev  
 C.  $\frac{T_m}{N \times L}$  mm/rev                      D.  $\frac{T_m \times L}{N}$  mm/rev
3. The main advantage of the radial drilling machine is that  
 A. It is very compatible and handy for machining  
 B. It is accurate, economical, portable and least time consuming while machining  
 C. Heavy workpieces can be machined in any position without moving them  
 D. Small workpieces can be machined and it can be used for mass production as well
4. For the purpose of sampling inspection, the maximum percent defective that can be considered satisfactory as a process average is  
 A. Rejectable Quality Level (RQL)  
 B. Acceptable Quality Level (AQL)  
 C. Average Outgoing Quality Limit (AOQL)  
 D. Lot Tolerance Percent Defective (LTPD)
5. Hard automation is also called  
 A. Selective automation  
 B. Total automation  
 C. Group technology  
 D. Fixed position automation
6. The method of CNC programming which enables the programmer to describe part geometry using variables is  
 A. Computer assisted part programming  
 B. Computer aided drafting programming  
 C. Conversational programming  
 D. Parametric programming
7. Revolving joint of the robot is referred to as  
 A. L joint                              B. O joint  
 C. T joint                              D. V joint
8. Repairing of a machine consists of 5 steps that must be performed sequentially. Time taken to perform each of the 5 steps is found to have an experimental distribution with a mean of 5 minutes and is independent of other steps. If these machines break down in Poisson fashion at an average rate of 2 hour and if there is only one repairman, the average idle time for each machine that has broken down will be  
 A. 120 minutes                      B. 110 minutes  
 C. 100 minutes                      D. 90 minutes
9. A problem of the total float within which an activity can be delayed for start without affecting the floats of preceding activities is called  
 A. Safety float  
 B. Free float  
 C. Independent float  
 D. Interfering float
10. An oil engine manufacturer purchases lubricant cans at the rate of Rs. 42 per piece from a vendor. The requirement of these lubricant cans is 1800 per year. If the cost per placement of an order is Rs. 16 and inventory carrying charges per rupee per year is 20 paise, the order quantity per order will be  
 A. 91 cans                              B. 83 cans  
 C. 75 cans                              D. 67 cans
11. Consider the following data regarding the acceptance sampling process:  
 $N = 10,000$ ,  $n = 89$ ,  $c = 2$ ,  $P = 0.01$ , and  $P_a = 0.9397$   
 The Average Total Inspection (ATI) will be  
 A. 795                                      B. 687  
 C. 595                                      D. 487

- 12.** The Non-Destructive Inspection (NDI) technique employed during inspection for castings of tubes and pipes to check the overall strength of a casting in resistance to bursting under hydraulic pressure is
- A. Radiographic inspection
  - B. Magnetic particle inspection
  - C. Fluorescent Penetrant
  - D. Pressure testing
- 13.** Consider the situation where a microprocessor gives an output of an 8-bit word. This is fed through an 8-bit digital to analogue converter to a control valve. The Control valve requires 6.0 V being fully open. If the fully open state is indicated by 11111111, the output to the valve for a change of 1-bit will be
- A. 0.061 V                      B. 0.042 V
  - C. 0.023 V                      D. 0.014 V
- 14.** Which of the following factors are to be considered while selecting a microcontroller?
- (1) Memory requirements
  - (2) Processing speed required
  - (3) Number of input/output pins
- A. 1 and 2 only      B. 1 and 3 only
  - C. 2 and 3 only      D. 1, 2 and 3
- 15.** Which of the following statements regarding interface circuit are correct?
- (1) Electrical buffering is needed when the peripheral operates at a different voltage or current to that on the microprocessor bus system or there are different ground references.
  - (2) Timing control is needed when the data transfer rates of the peripheral and the microprocessor different.
  - (3) Changing the number of lines is needed when the codes used by the peripherals differ from those used by the microprocessor.
- A. 1 and 2 only      B. 1 and 3 only
  - C. 2 and 3 only      D. 1, 2 and 3
- 16.** Alternative paths provided by vertical paths from the main rung of a ladder diagram, that is, paths in parallel, represent
- A. Logical AND operations
  - B. Logical OR operations
  - C. Logical NOT operations
  - D. Logical NOR operations
- 17.** The resolution of an encoder with 10 tracks will be nearly
- A. 0.15°                              B. 0.25°
  - C. 0.35°                              D. 0.45°
- 18.** Which of the following features is/are relevant to variable reluctance stepper motors?
- (1) Smaller rotor mass; more responsive
  - (2) Step size is small
  - (3) More sluggish
- A. 1 only                              B. 2 only
  - C. 3 only                              D. 1, 2 and 3
- 19.** Which of the following statements regarding hydraulic pumps are correct?
- (1) The gear pump consists of two close-meshing gear wheels which rotate in opposite directions.
  - (2) In vane pump, as the rotor rotates, the vanes follow the contours of the casing.
  - (3) The leakage is more in vane pump compared to gear pump
- A. 1, 2 and 3                      B. 1 and 2 only
  - C. 1 and 3 only                      D. 2 and 3 only

**20.** The selection of the right controller for the application depends on

- (1) The degree of control required by the application
- (2) The individual characteristics of the plants
- (3) The desirable performance level including required response, steady-state deviation and stability.

Which of the above statements are correct?

- A. 1 and 2 only      B. 1 and 3 only
- C. 2 and 3 only      D. 1, 2 and 3

**21.** Consider a system described by

$$\dot{x} = Ax + Bu$$

$$y = Cx + Du$$

The system is completely output controllable if and only if

A. The matrix

$$[CB : CBA : CB^2A : \dots : CB^{n-1}A : D]$$

is of rank n

B. The matrix

$$[CB : CBA : CA^2B : \dots : CA^{n-1}A : D]$$

C. The matrix

$$[BC : BAC : BA^2C : \dots : BA^{n-1}C : D]$$

D. The matrix

$$[BC : ABC : CA^2B : \dots : CB^{n-1}A : D]$$

Where :

x = State vector (n-vector)

u = Control vector (r-vector)

y = Output vector (m-vector)

A = n × n matrix

B = n × r matrix

C = m × n matrix

D = m × r matrix

**22.** Which one of the following symbols is used as the notation for designating arm and body of a robot with joined arm configuration ?

- A. TRL
- B. TLL, LTL, LVL
- C. LLL
- D. TRR, VVR

**23.** A complaint motion control of robots can be understood by the problem of controlling of

- A. Position and velocity of joints
- B. Position and acceleration of the end-effector
- C. Manipulator motion and its force interactions with environment
- D. Joint velocities of given end-effector velocity

**24.** For the vector  $v = 25i + 10j + 20k$ , perform a translation by a distance 8 in the x-direction, 5 in the y-direction and 0 in the z-direction. The translated vector  $Hv$  will be

A.  $\begin{bmatrix} 1 \\ 20 \\ 33 \\ 15 \end{bmatrix}$       B.  $\begin{bmatrix} 33 \\ 15 \\ 20 \\ 1 \end{bmatrix}$

C.  $\begin{bmatrix} 15 \\ 33 \\ 1 \\ 20 \end{bmatrix}$       D.  $\begin{bmatrix} 1 \\ 15 \\ 20 \\ 33 \end{bmatrix}$

**25. Statement (I):** The greater the chemical affinity of two metals, the more restricted is their solid solubility and greater is the tendency of formation of compound.

**Statement (II):** Wider the separation of elements in the periodic table, greater is their chemical affinity.

**26. Statement (I) :** The size of a memory unit is specified in terms of the number of storage locations available, 1 K is  $2^{10} = 1024$  locations and thus a 4 K memory has 4096 locations.

**Statement (II) :** Erasable and programmable ROM (EPROM) is a form of memory unit used for ROMs that can be programmed and their contents altered.

**27. Statement (I) :** Microprocessors which have memory and various input/output arrangements, all on the same chip, are called microcontrollers.

**Statement (II) :** The microcontroller is the integration of a microprocessor with RAM, ROM, EPROM, EEPROM and I/O interfaces, and other peripherals such as timers, on a single chip.

**28. Statement (I) :** Capacitive proximity sensor can only be used for the detection of metal objects and is best with ferrous metals.

**Statement (II):** One form of capacitive proximity sensor consists of a single capacitor plate probe with the other plate being formed by the object, which has to be metallic and earthed.

**29. Statement (I) :** SCARA configuration provides substantial rigidity for the robot in the vertical direction, but compliance in the horizontal plane.

**Statement (II) :** A special version of the Cartesian coordinate robot is the SCARA, which has a very high lift capacity as it is designed for high rigidity.

**30. Statement (I) :** The stopper motor is a device that produces rotation through equal angles, the so-called steps, for each digital pulse supplied to its input.

**Statement (II) :** Stepper motors can be used to give controlled rotational steps but cannot give continuous rotation, as a result their applications are limited to step angles only.

**31.** A stone weighs 400 N in air and when immersed in water it weighs 225 N. If the

specific weight of water is  $9810 \text{ N/m}^3$ , the relative density of the stone will be nearly

- A. 5.9                      B. 4.7  
C. 3.5                      D. 2.3

**32.** A flat plate  $0.1 \text{ m}^2$  area is pulled at  $30 \text{ cm/s}$  relative to another plate located at a distance of  $0.01 \text{ cm}$  from it, the fluid separating them being water with viscosity of  $0.001 \text{ Ns/m}^2$ . The power required to maintain velocity will be

- A.  $0.05 \text{ W}$                       B.  $0.07 \text{ W}$   
C.  $0.09 \text{ W}$                       D.  $0.11 \text{ W}$

**33.** When the pressure of liquid is increased from  $3 \text{ MN/m}^2$  to  $6 \text{ MN/m}^2$ , its volume is decreased by  $0.1\%$ . The bulk modulus of elasticity of the liquid will be

- A.  $3 \times 10^{12} \text{ N/m}^2$     B.  $3 \times 10^9 \text{ N/m}^2$   
C.  $3 \times 10^8 \text{ N/m}^2$     D.  $3 \times 10^4 \text{ N/m}^2$

**34.** A curve that is everywhere tangent to the instantaneous local velocity vector, is

- A. Streak line                      B. Path line  
C. Normal line                      D. Streamline

**35.** A  $120 \text{ mm}$  diameter jet of water is discharging from a nozzle into the air at a velocity of  $40 \text{ m/s}$ . The power in the jet with respect to a datum at the jet will be

- A.  $380 \text{ kW}$   
B.  $360 \text{ kW}$   
C.  $340 \text{ kW}$   
D.  $320 \text{ kW}$

**36.** Which of the following applications regarding Navier-Stokes equations are correct?

- (1) Laminar unidirectional flow between stationary parallel plates.  
(2) Laminar unidirectional flow between parallel plates having no relative motion.  
(3) Laminar flow in circuit pipes

(4) Laminar flow between concentric rotating cylinders.

- A. 1, 2 and 3 only
- B. 1, 3 and 4 only
- C. 1, 2 and 4 only
- D. 2, 3 and 4 only

**37.** A crude oil having a specific gravity of 0.9 flows through a pipe of diameter 0.15 m at the rate of 8 lps. If the value of  $\mu$  is 0.3 Ns/m<sup>2</sup>, the Reynolds number will be nearly

- A. 295
- B. 235
- C. 205
- D. 165

**38.** Two pipes of lengths 2500 m each and diameters 80 cm and 60 cm respectively, are connected in parallel. The coefficient of friction for each pipe is 0.006 and the total flow is 250 litres/s. The rates of flow in the pipes are nearly

- A. 0.17 m<sup>3</sup>/s and 0.1 m<sup>3</sup>/s
- B. 0.23 m<sup>3</sup>/s and 0.1 m<sup>3</sup>/s
- C. 0.17 m<sup>3</sup>/s and 0.4 m<sup>3</sup>/s
- D. 0.23 m<sup>3</sup>/s and 0.4 m<sup>3</sup>/s

**39.** A fluid of mass density 1790 kg/m<sup>3</sup> and viscosity 2.1 Ns/m<sup>2</sup> flows at a velocity of 3 m/s in a 6 cm diameter pipe. The head loss over a length 12 m pipe will be nearly

- A. 62.0 m
- B. 54.0 m
- C. 46.5 m
- D. 38.5 m

**40.** Which of the following characteristics regarding fluid kinematics is/are correct?

(1) Streamline represents an imaginary curve in the flow field so that the tangent to the curve at any point represents the direction of instantaneous velocity at the point.

(2) Path lines, streamlines and streak lines are identical in steady flow.

- A. 1 only
- B. 2 only
- C. Both 1 and 2
- D. Neither 1 nor 2

**41.** To maintain 0.08 m<sup>3</sup>/s flow of petrol with a specific gravity of 0.7, through a steel pipe of 0.3 m diameter and 800 m length, with coefficient of friction of 0.0025 in the Darcy relation, the power required will be nearly

- A. 0.6 kW
- B. 1.0 kW
- C. 2.6 kW
- D. 3.0 kW

**42.** The diameter of a nozzle  $d$  for maximum transmission of power through it, is

- A.  $\left[ \frac{D^5}{8fL} \right]^{\frac{1}{4}}$
- B.  $\left[ \frac{D^5}{8fL} \right]^{\frac{1}{2}}$
- C.  $\left[ \frac{8D^5}{fL} \right]^{\frac{1}{4}}$
- D.  $\left[ \frac{8D^5}{fL} \right]^{\frac{1}{2}}$

**43.** A piston-cylinder device with air at an initial temperature of 30°C undergoes an expansion process for which pressure and volume are related as given below:

p (kPa)	100	37.9	14.4
V (m <sup>3</sup> )	0.1	0.2	0.4

The work done by the system for  $n = 1.4$  will be

- A. 4.8 kJ
- B. 6.8 kJ
- C. 8.4 kJ
- D. 10.6 kJ

**44.** A domestic food freezer maintains a temperature of -15°C. The ambient air temperature is 30°C. If heat leaks into the freezer at the continuous rate of 1.75 kJ/s, the least power necessary to pump this heat out continuously will be nearly

- A. 0.1 kW
- B. 0.2 kW
- C. 0.3 kW
- D. 0.4 kW

- 45.** An ideal gas is flowing through an insulated pipe at the rate of 3 kg/s. There is a 10% pressure drop from an inlet to exit of the pipe. The values of  $R = 0.287 \text{ kJ/kg.K}$  and  $T_0 = 300 \text{ K}$ . The rate of energy loss for the pressure drop due to friction, will be nearly
- A. 34 kW                      B. 30 kW  
C. 26 kW                      D. 22 kW
- 46.** A cyclic heat engine operates between a source temperature of  $800^\circ\text{C}$  and a sink temperature of  $30^\circ\text{C}$ . The least rate of heat rejection per kW net output of engine will be nearly
- A. 0.2 kW                      B. 0.4 kW  
C. 0.6 kW                      D. 0.8 kW
- 47.** A fictitious pressure that, if it acted on the piston during the entire power stroke, would produce the same amount of net work as that produced during the actual cycle is called
- A. Quasi equivalent pressure  
B. Mean equivalent pressure  
C. Mean effective pressure  
D. Quasi static pressure
- 48.** An ideal cycle based on the concept of combination of two heat transfer processes, one at constant volume and the other at constant pressure, is called
- A. Otto cycle                  B. Dual cycle  
C. Diesel cycle                D. Carnot cycle
- 49.** The ideal thermodynamic cycle for the development of gas turbine engine is
- A. Otto                          B. Stirling  
C. Ericsson                      D. Brayton
- 50.** If the pressure at exhaust from the turbine is the saturation pressure corresponding to the temperature desired in the process heater, such a turbine is called
- A. Condensing turbine  
B. Extraction turbine  
C. Pass out turbine  
D. Back pressure turbine
- 51.** The purpose of providing fins on heat transfer surface is to increase
- A. Temperature gradient so as to enhance heat transfer by convection  
B. Effective surface area to promote rate of heat transfer by convection  
C. Turbulence in flow for enhancing heat transfer by convection  
D. Pressure drop of the fluid
- 52.** For fully developed laminar pipe flow the average velocity is
- A. One-half of the maximum velocity  
B. One-third of the maximum velocity  
C. One-fourth of the maximum velocity  
D. Two-third of the maximum velocity
- 53.** The overall heat transfer coefficient due to convection and radiation for a steam maintained at  $200^\circ\text{C}$  running in a large room at  $30^\circ\text{C}$  is  $17.95 \text{ W/m}^2\text{K}$ . If the emissivity of the pipe surface is 0.8; the value of  $\sigma = 5.67 \times 10^{-8} \text{ W/m}^2\text{K}^4$ ; the heat transfer coefficient due to radiation will be nearly
- A.  $17 \text{ W/m}^2\text{K}$                   B.  $14 \text{ W/m}^2\text{K}$   
C.  $11 \text{ W/m}^2\text{K}$                   D.  $8 \text{ W/m}^2\text{K}$
- 54.** Large heat transfer coefficients for vapour condensation can be achieved by promoting
- A. Film condensation  
B. Dropwise condensation  
C. Cloud condensation  
D. Dew condensation
- 55.** Which one of the following valves is provided for starting the engine manually, during cold weather conditions?
- A. Starting jet valve  
B. Compensating jet valve  
C. Choke valve  
D. Auxiliary air valve

- 56.** A 4-cylinder, 4-stroke single acting petrol engine consumes 6 kg of fuel per minute at 800 rpm when the air-fuel ratio of the mixture supplied is 9 : 1. The temperature is 650 K and pressure is 12.5 bar at the end of compression stroke. Take  $R = 300 \text{ Nm/kg.K}$ , diameter of cylinder as 8 cm, stroke of cylinder as 10 cm. The compression ratio will be nearly
- A. 6.2                      B. 5.7  
C. 5.2                      D. 4.6
- 57.** Ice is formed at  $0^\circ\text{C}$  from water at  $20^\circ\text{C}$ . The temperature of the brine is  $-8^\circ\text{C}$ . The refrigeration cycle used is perfect reversed Carnot cycle. Latent heat of ice = 335 kJ/kg, and  $C_{pw} = 4.18$ . The ice formed per kWh will be nearly
- A. 81.4 kg  
B. 76.4 kg  
C. 71.8 kg  
D. 68.8 kg
- 58.** A Freon 12 simple saturation cycle operates at temperatures of  $35^\circ\text{C}$  and  $-15^\circ\text{C}$  for the condenser and evaporator. If the refrigeration effect produced by the cycle is 111.5 kJ/kg and the work required by the compressor is 27.2 kJ/kg, the value of COP will be nearly
- A. 4.1                      B. 3.6  
C. 3.1                      D. 2.6
- 59.** A cold storage is to be maintained at  $-5^\circ\text{C}$  while the surroundings are at  $35^\circ\text{C}$ . The heat leakage from the surroundings into the cold storage is estimated to be 29 kW. The natural COP of the refrigeration plant used in one-third of an ideal plant working between the same temperatures. The power required to drive the plant will be
- A. 10 kW                      B. 11 kW  
C. 12 kW                      D. 13 kW
- 60.** A single acting two-stage air compressor deals with  $4 \text{ m}^3/\text{min}$  of air at 1.013 bar and  $15^\circ\text{C}$  with a speed of 250 rpm. The delivery pressure is 80 bar. If the inter cooling is complete, the intermittent pressure after first stage will be
- A. 9 bar                      B. 8 bar  
C. 7 bar                      D. 6 bar
- 61.** Which of the following are the advantages of Nano-composite materials ?
1. Decreased thermal expansion coefficients
  2. Higher residual stress
  3. Reduced gas permeability
  4. Increased solvent resistance
- A. 1, 2 and 3 only  
B. 1, 3 and 4 only  
C. 1, 2 and 4 only  
D. 2, 3 and 4 only
- 62.** A rod of copper originally 305 mm long is pulled in tension with a stress of 276 MPa. If the modulus of elasticity is 110 GPa and the deformation is entirely elastic, the resultant elongation will be nearly
- A. 1.0 mm                      B. 0.8 mm  
C. 0.6 mm                      D. 0.4 mm
- 63.** A 1.25 cm diameter steel bar is subjected to a load of 2500 kg. The stress induced in the bar will be
- A. 200 MPa                      B. 210 MPa  
C. 220 MPa                      D. 230 MPa
- 64.** The maximum energy which can be stored in a body up to the elastic limit is called
- A. Proof resilience  
B. Modulus of resilience  
C. Impact toughness  
D. Endurance strength
- 65.** A cast iron bed plate for a pump has a crack length of 100  $\mu\text{m}$ . If the Young's modulus of



cast iron is  $210 \text{ GN/m}^2$  and the specific surface energy is  $10 \text{ J/m}^2$ , the fracture strength required will be nearly

- A.  $1.0 \times 10^8 \text{ N/m}^2$
- B.  $1.2 \times 10^8 \text{ N/m}^2$
- C.  $1.4 \times 10^8 \text{ N/m}^2$
- D.  $1.6 \times 10^8 \text{ N/m}^2$

**66.** A 13 mm diameter tensile specimen has 50 mm gauge length. If the load corresponding to the 0.2% offset is 6800 kg. the yield stress will be nearly

- A.  $31 \text{ kg/mm}^2$
- B.  $43 \text{ kg/mm}^2$
- C.  $51 \text{ kg/mm}^2$
- D.  $63 \text{ kg/mm}^2$

**67.** The magnitude of the velocity of any point on the kinematic link relative to the other point on the same kinematic link is the product of

- A. A square root of an angular velocity of the link and the distance between the two points under consideration
- B. An angular velocity of the link and the square of distance between the two points under consideration
- C. A square of an angular velocity of the link and the distance between the two points under consideration
- D. An angular velocity of the link and the distance between the two points under consideration

**68.** In a mechanism, the number of Instantaneous centre (I-centres) N is

- A.  $\frac{n(n-1)}{2}$
- B.  $\frac{2(2n-1)}{2}$
- C.  $\frac{2n(n-1)}{3}$
- D.  $\frac{n(2n-1)}{3}$

**69.** In cycloidal motion of cam follower, the maximum acceleration of follower motion

$$f_{\max} \text{ at } \theta = \frac{\phi}{4}$$

- A.  $\frac{h\pi\omega^2}{2\phi^2}$
- B.  $\frac{3h\pi\omega^2}{2\phi^2}$
- C.  $\frac{2h\pi\omega^2}{\phi^2}$
- D.  $\frac{3h\pi\omega^2}{\phi^2}$

**70.** A shaft of span 1 m and diameter 25 mm is simply supported at the ends. It carries a 1.5 kN concentrated load at mid-span. If E is 200 GPa, its fundamental frequency will be nearly

- A. 3.5 Hz
- B. 4.2 Hz
- C. 4.8 Hz
- D. 5.5 Hz

**71.** A vibrating system consists of mass of 50 kg, a spring with stiffness of 30 kN/m and a damper. If damping is 20% of the critical value, the natural frequency of damped vibrations will be

- A. 16 rad/s
- B. 20 rad/s
- C. 24 rad/s
- D. 28 rad/s

**72.** A refrigerator unit having a mass of 35 kg is to be supported on three springs, each having spring stiffness s. The unit operates at 480 rpm. If only 10% of the shaking force is allowed to transmit to the supporting structure, the value of stiffness will be nearly

- A. 2.7 N/mm
- B. 3.2 N/mm
- C. 3.7 N/mm
- D. 4.2 N/mm

**73.** In which one of the following tooth profiles, does the pressure angle remain constant throughout the engagement of teeth?

- A. Cycloidal
- B. Involute
- C. Conjugate
- D. Epicycloid

**74.** If the axes of the first and last wheels of a compounded gear coincide, it is called

- A. Simple gear train
- B. Compound gear train
- C. Epicyclic gear train
- D. Reverted gear train

**75.** In a reciprocating engine, the force along the connecting rod  $F_Q$  is

- A.  $\frac{F_P}{\sqrt{n^2 - \sin^2 \theta}}$       B.  $\frac{F_P}{2\sqrt{n^2 - \sin^2 \theta}}$   
 C.  $\frac{nF_P}{2\sqrt{n^2 - \sin^2 \theta}}$       D.  $\frac{nF_P}{\sqrt{n^2 - \sin^2 \theta}}$

$F_P$  = Force on piston

$$n = \frac{L}{r}$$

$\theta$  = Angle for crank from IDC

**76.** A mass  $m_1$  attached to a shaft at radius  $r_1$ , rotating with angular velocity  $\omega$  rad/s, can be balanced by another single mass  $m_2$  which is attached to the opposite side of the shaft at radius  $r_2$ , in the same plane, if

- A.  $m_1 r_2 = m_2 r_1$       B.  $m_1 r_2 = m_2 r_2$   
 C.  $m_1 r_1 \omega_1 = m_2 r_2 \omega_2$       D.  $m_1 r_2 \omega_1 = m_2 r_1 \omega_2$

**77.** For a single cylinder reciprocating engine speed is 500 rpm, stroke is 150 mm, mass of reciprocating parts is 21 kg; mass of revolving parts is 15 kg at crank radius. If two-thirds of reciprocating masses and all the revolving masses are balanced, the mass at a radius of 150 mm will be

- A. 7.5 kg      B. 10.5 kg  
 C. 12.5 kg      D. 14.5 kg

**78.** If the axes of the rolling of the ship and of the stabilizing rotor are parallel, it will result in

- A. A higher bow and lower stern  
 B. A lower bow and higher stern  
 C. Turning towards left  
 D. No gyroscopic effect

**79.** Coaxing is a process of

- A. Improving the fatigue properties attained by under-stressing and then raising the stress in small increments  
 B. Decreasing the hardness by full annealing

- C. Increasing the uniaxial tensile strength by heating above recrystallization temperature and quenching in oil media  
 D. Maintaining the ductility of the material by chemical treatment.

**80.** According to the distortion-energy theory, the yield strength in shear is

- A. 0.277 times the yield stress  
 B. 0.377 times the maximum shear stress  
 C. 0.477 times the yield strength in tension  
 D. 0.577 times the yield strength in tension

**81.** For the prediction of ductile yielding, the theory of failure utilized is

- A. Maximum strain energy theory  
 B. Distortion energy theory  
 C. Maximum normal strain theory  
 D. Mohr theory

**82.** A steel specimen is subjected to the following principal stresses: 120 MPa tensile, 60 MPa tensile and 30 MPa compressive. If the proportionality limit for the steel specimen is 250 MPa; the factor of safety as per maximum shear stress theory will be nearly

- A. 1.3  
 B. 1.7  
 C. 2.3  
 D. 2.7

**83.** For which one of the following loading conditions is the standard endurance strength multiplied by a load factor,  $K_e = 0.9$ ?

- A. Reversed beam bending loads  
 B. Reversed axial loads with no bending  
 C. Reversed axial loads with intermediate bending  
 D. Reversed torsion loads

**84.** A 120 mm wide uniform plate is to be subjected to a tensile load that has a maximum value of 250 kN and a minimum value of 100 kN. The properties of the plate material are : endurance

limit stress is 225 MPa yield point stress is 300 MPa. If the factor of safety based on yield point is 1.5, the thickness of the plate will be nearly.

- A. 12 mm
- B. 14 mm
- C. 16 mm
- D. 18 mm

**85.** A steel connecting rod having  $S_{ut} = 1000 \text{ MN/m}^2$ ,  $S_{yt} = 900 \text{ MN/m}^2$  is subjected to a completely reversed axial load of 50 kN. By neglecting any column action, if the values of  $k_e = 0.85$ ,  $k_b = 0.82$ ,  $k_t = 1.5$  and  $N = 2$ , the diameter of the rod will be nearly

- A. 20 mm
- B. 23 mm
- C. 26 mm
- D. 29 mm

**86.** During crushing or bearing failure of riveted joints

- A. The holes in the plates become oval shaped and joints become loose
- B. There is tearing of the plate at an edge
- C. The plates will crack in radial directions and joints fail
- D. The rivet heads will shear out by applied stress

**87.** The double riveted joint with two cover plates for boiler shell is 1.5 m in diameter subjected to steam pressure of 1 MPa. If the joint efficiency is 75% allowable tensile stress in the plate is  $83 \text{ MN/m}^2$ , compressive stress is  $138 \text{ MN/m}^2$  and shear stress in the rivet is  $55 \text{ MN/m}^2$ , the diameter of rivet hole will be nearly

- A. 8 mm
- B. 22 mm
- C. 36 mm
- D. 52 mm

**88.** A bearing supports a radial load of 7000 N and a thrust load of 2100 N. The desired life of the ball bearing is  $160 \times 10^6$  revolutions at 300 rpm. If the load is uniform and steady, service factor is 1, radial factor is 0.65, thrust factor is

3.5,  $k = 3$  and rotational factor is 1, the basic dynamic load rating of a bearing will be nearly ;

- A. 65 kN
- B. 75 kN
- C. 85 kN
- D. 95 kN

**89.** A solid cast iron disk, 1 m in diameter and 0.2 m thick is used as a flywheel. It is rotating at 350 rpm. It is brought to rest in 1.5 s by means of a brake. If the mass density of cast iron is  $7200 \text{ kg/m}^3$ , the torque exerted by the brake will be nearly

- A. 3.5 kN m
- B. 4.5 kN m
- C. 5.3 kN m
- D. 6.3 kNm

**90.** The torque transmitting capacity of friction clutches can be increased by

- A. Use of friction material with a lower coefficient of friction
- B. Decreasing the mean radius of the friction disk
- C. Increasing the mean radius of the friction disk
- D. Decreasing the plate pressure

**91.** The ideal gas-refrigeration cycle is the same as the

- A. Brayton cycle
- B. Reversed Brayton cycle
- C. Vapour compression refrigeration cycle
- D. Vapour absorption refrigeration cycle

**92.** If the atmospheric conditions are  $20^\circ \text{C}$ , 1.013 bar and specific humidity of 0.0095 kg/kg dry air, the partial pressure of vapour will be nearly

- A. 0.076 bar
- B. 0.056 bar
- C. 0.036 bar
- D. 0.016 bar

**93.** In air-conditioning systems, air may be cooled and dehumidified by

1. Spraying chilled water to air in the form of fine mist.
2. Circulating chilled water or brine in a tube placed across the air flow.

3. Placing the evaporator coil across the air flow.

Which of the above statements are corrects?

- A. 1 and 2 only      B. 1 and 3 only  
C. 2 and 3 only      D. 1, 2 and 3

**94.** A duct of rectangular cross-section 600 mm × 400 mm carries 90 m<sup>3</sup>/min of air having density of 1.2kg/m<sup>3</sup>. When the quantity of air in both cases is same, the equivalent diameter of a circular duct will be nearly

- A. 0.86 m              B. 0.76 m  
C. 0.64 m              D. 0.54 m

**95.** A room having dimensions of 5 m × 5 m × 3 m contains air at 25° C and 100 kPa at a relative humidity of 75%. The corresponding value of  $p_s$  is 3.169 kPa. The partial pressure of dry air will be nearly

- A. 106 kPa              B. 98 kPa  
C. 86 kPa                D. 78 kPa

**96.** A measure of feeling warmth or coolness by the human body in response to the air temperature, moisture content and air motion is called

- A. Dry bulb tempter  
B. Effective temperature  
C. Wet bulb temperature  
D. Dew point temperature 97.?

**97.** While designing a Pelton wheel, the velocity of wheel 'u' is

- A.  $K_u \sqrt{gH}$   
B.  $2K_u \sqrt{gH}$   
C.  $K_u \sqrt{2gH}$   
D.  $2K_u \sqrt{2gH}$

where:

$K_u$  = Speed ratio

H = Net head on turbine

g = Gravity

**98.** The turbines of the same shape will have the same

- A. Thomas number  
B. Reynolds number  
C. Specific speed  
D. Rotational speed

**99.** A centrifugal pump is required to lift 0.0125 m<sup>3</sup>/s of water from a well with depth 30 m. If rating of the pump motor is 5 kW, and the density of water is 1000 kg/m<sup>3</sup>, the efficiency of the pump will be nearly

- A. 82%                      B. 74%  
C. 66%                      D. 58%

**100.** An inward flow reaction turbine has an external diameter of 1 m and its breadth at inlet is 250 mm. If the velocity of flow at inlet is 2 m/s and 10% of the area of flow is blocked by blade thickness, the weight of water passing through the turbine will be nearly

- A. 10 kN/s                B. 14 kN/s  
C. 18 kN/s                D. 22 kN/s

**101.** The process of abstracting steam at a certain section of the turbine and subsequently using it for heating feed water supplied to the boiler is called

- A. Reheating  
B. Regeneration  
C. Bleeding  
D. Binary vapour cycle

**102.** When blade speed ratio is zero, no work is done because the distance travelled by the blade is zero even if the torque on the blade

- A. is minimum              B. is zero  
C. is maximum              D. remains the same

- 103.** In an axial flow turbine, the utilization factor has an absolute maximum value of unity, for any degree of reaction if the value of nozzle angle  $\alpha$  is
- A.  $270^\circ$                       B.  $180^\circ$   
 C.  $90^\circ$                          D.  $0^\circ$  104.
- 104.** Which of the following are essential for a good combustion chamber of turbojet engine?
1. It should allow complete combustion of fuel.
  2. It should maintain sufficiently high temperatures in the zone of combustion in addition to proper atomization of fuel thus leading to continuous combustion.
  3. It should not have high rate of combustion.
  4. The pressure drop should be as small as possible.
- A. 1, 2 and 4 only              B. 1, 2 and 3 only  
 C. 1, 3 and 4 only              D. 2, 3 and 4 only
- 105.** If  $m_f$  is the mass of fuel supplied per kg of air in one second, then the mass of gases leaving the nozzle of turbojet will be
- A.  $(1 - m_f)$  kg/s              B.  $\frac{1}{(1 + m_f)}$  kg/s  
 C.  $(1 + m_f)$  kg/s              D.  $\frac{1}{(1 - m_f)}$  kg/s
- 106.** Which one of the following may be considered as a single cylinder two-stroke reciprocating engine running at 2400 rpm to 2700 rpm for rapid chain of impulses?
- A. Turbo jet                      B. Pulse jet  
 C. Ram jet                         D. Athodyd jet
- 107.** In jet propulsion of ships, when the inlet orifices are at right angles to the direction of motion of the ships, the efficiency of propulsion  $\eta$  is
- A.  $\frac{2u^2}{V + u}$                       B.  $\frac{2Vu}{(V + u)^2}$   
 C.  $\frac{2u}{(V + u)^2}$                       D.  $\frac{2Vu}{V + 2u}$
- 108.** 0.8 kg of air flows through a compressor under steady state conditions. The properties of air at entry are: pressure 1 bar, velocity 10 m/s, specific volume  $0.95\text{m}^3/\text{kg}$  and internal energy 30 kJ/kg. The corresponding values at exit are 8 bar, 6 m/s,  $0.2\text{m}^3/\text{kg}$  and 124 kJ/kg. Neglecting change in potential energy, the power input will be
- A. 117 kW                         B. 127 kW  
 C. 137 kW                         D. 147 kW
- 109.** In a power plant, the efficiency of the electric generator, turbine, boiler, cycle and the overall plant are 0.97, 0.95, 0.92, 0.92, 0.42 and 0.33 respectively. In the generated electricity, the auxiliaries will consume nearly
- A. 7.3%                             B. 6.5%  
 C. 5.7%                             D. 4.9%
- 110.** The higher power requirements for compression in a steam power plant working on Carnot vapour cycle
- A. Increases the plant efficiency as well as work ratio  
 B. Reduces the plant efficiency as well as work ratio  
 C. Does not affect the plant efficiency as well as work ratio  
 D. Increases the plant efficiency and reduces work ratio
- 111.** For the same compression ratio, the Brayton cycle efficiency is
- A. Same as the Diesel cycle efficiency  
 B. Equal to the Otto cycle efficiency  
 C. More than the Diesel cycle efficiency  
 D. Less than the Otto cycle efficiency
- 112.** An economizer in a steam generator performs the function of preheating the
- A. Combustion air  
 B. Feed water  
 C. Input fuel  
 D. Combustion air as well as input fuel


- 113.** Air enters the compressor of a gas turbine plant operating on Brayton cycle at 1 bar and 27°C. The pressure ratio in the cycle is 6. If the relation between the turbine work  $W_T$  and compressor work  $W_C$  is  $W_T = 3W_C$  and  $\gamma = 1.4$ , the cycle efficiency will be nearly
- A. 40%                      B. 50%  
C. 60%                      D. 70%
- 114.** A fluidized bed combustion system having an output of 35 MW at 80% efficiency when using a coal of heating value 26 MJ/kg with a Sulphur content of 3.6% requires a particular limestone to be fed to it at a calcium-sulphur molar ratio of 3.0 so as to limit emissions of  $SO_2$  adequately. The limestone used contains 85%  $CaCO_3$ . The required flow rate of limestone will be
- A. 2405 kg/h                B. 2805 kg/h  
C. 3205 kg/h                D. 3605 kg/h
- 115.** In Orsat apparatus, when the percentage of carbon dioxide, oxygen and carbon monoxide are known, the remaining gas is assumed to be
- A. Hydrogen  
B. Sulphur dioxide  
C. Nitrogen  
D. Air
- 116.** The partial vacuum created by the fan in the furnace and flues, draws the product of the combustion from the main flue and allows them to pass up to the chimney. Such a draught is called
- A. Balanced draught  
B. Forced draught  
C. Induced draught  
D. Artificial draught
- 117.** Which of the following are applied (used) ways of compounding steam turbines?
1. Pressure compounding
  2. Temperature compounding
  3. Velocity compounding
- A. 1, 2 and 3                B. 1 and 2 only  
C. 2 and 3 only              D. 1 and 3 only
- 118.** A steam ejector which removes air and other non-condensable gases from the condenser is known as
- A. Wet air pump  
B. Dry air pump  
C. Centrifugal pump  
D. Circulating pump
- 119.** In a heat exchanger, 50 kg of water is heated per minute from 50°C to 110°C by hot gases which enter the heat exchanger at 250°C. The value of  $C_p$  for water is 4.186 kJ/kg.K and for air is 1 kJ/kg.K. If the flow rate of gases is 100 kg/min, the net change of enthalpy of air will be nearly
- A. 17.6 MJ/min              B. 15.0 MJ/min  
C. 12.6 MJ/min              D. 10.0 MJ/min
- 120.** The phenomenon that enables cooling towers to cool water to a temperature below the dry bulb temperature of air is termed as
- A. Chemical dehumidification  
B. Adiabatic evaporative cooling  
C. Cooling and dehumidification  
D. Sensible cooling
- 121.** The angle through which the Earth must turn to bring the meridian of a point directly in line with the Sun's rays is called
- A. Altitude angle  
B. Hour angle  
C. Solar azimuth angle  
D. Zenith angle

- 122.** In which type of collector is solar radiation focused into the absorber from the top, rather than from the bottom?
- A. Fresnel lens      B. Paraboloidal  
C. Concentrating    D. Compound parabolic
- 123.** A flat plate collector is 150 cm wide and 180 cm high and is oriented such that it is perpendicular to the sun rays. Its active area is 90% of the panel size. If it is in a location that receives solar insolation of 1000 W/m<sup>2</sup> peak, the peak power delivered to the area of the collector will be
- A. 1.263 kW      B. 2.43 kW  
C. 4.46 kW      D. 6.26 kW
- 124.** A surface having high absorptance for short-wave radiation (less than 2.5 μm) and a low emittance of long-wave radiation (more than 2.5 μm), is called
- A. Absorber      B. Emitter  
C. Selective      D. Black
- 125.** In a solar tower power system, each mirror is mounted on a system called
- A. Regenerator      B. Linear Fresnel  
C. Dish      D. Heliostat
- 126.** The ratio of PV cell's actual maximum power output to its theoretical power output is called
- A. Quantum factor  
B. Fill factor  
C. Quantum efficiency  
D. PV factor
- 127.** With respect to the wind turbine blades, TSR means
- A. Tip Speed Ratio    B. Tip Sharp Ratio  
C. Tip Speed Ratio    D. Tip Swing Ratio
- 128.** For a wind turbine 10 m long running at 20 rpm in 12.9 kmph wind, the TSR will be nearly
- A. 3.6      B. 5.8  
C. 7.6      D. 9.8
- 129.** Which one of the following is an enclosure or housing for the generator, gear box and any other parts of the wind turbine that are on the top of the tower?
- A. Turbine blade  
B. Nacelle  
C. Turbine head  
D. Gear box
- 130.** The force required for producing tides in the ocean is
- A. 70% due to Moon and 30% due to Sun  
B. 30% due to Moon and 70% due to Sun  
C. 45% due to Moon and 55% due to Sun  
D. 55% due to Moon and 45% due to Sun
- 131.** Which of the following are related to the Proton Exchange Membrane Fuel Cell (PEMFC)?
1. Polymer electrolyte
  2. Hydrogen fuel and oxygen
  3. Pure water and small amount of electricity
  4. Nitrogen
- A. 1 and 3 only      B. 2 and 4 only  
C. 1 and 2 only      D. 3 and 4 only
- 132.** Which of the following are the essential functions of fuel cells?
1. The charging (or electrolyser) function in which the chemical AB is decomposed to A and B.
  2. The storage function in which A and B are held apart.

3. The charge function in which A and B are charged with the simultaneous generation of electricity.
- A. 1 and 3 only      B. 2 and 3 only  
C. 1 and 2 only      D. 1, 2 and 3
- 133.** The position of centroid can be determined by inspection, if an area has
- A. Single axis of symmetry  
B. Two axes of symmetry  
C. An irregular shape  
D. Centre axes of symmetry
- 134.** Which of the following statements of D'Alembert's Principle are correct?
1. The net external force  $F$  actually acting on the body and the inertia force  $F_1$  together keep the body in a state of fictitious equilibrium.
  2. The equation of motion may be written as  $F + (-ma) = 0$  and the fictitious force  $(-ma)$  is called an inertia force.
  3. It tends to give solution of a static problem an appearance akin to that of a dynamic problem.
- A. 1 and 3 only  
B. 1 and 2 only  
C. 2 and 3 only  
D. 1, 2 and 3
- 135.** The linear relationship between stress and strain for a bar in simple tension or compression is expressed with standard notations by the equation
- A.  $\sigma = E\varepsilon$   
B.  $\sigma = E\nu$   
C.  $\sigma = G\nu$   
D.  $\sigma = G\varepsilon$

- 136.** A punch is used for making holes in steel plates with thickness 8 mm. If the punch diameter is 20 mm and force required for creating a hole is 110 kN, the average shear stress in the plate will be nearly
- A. 139 MPa      B. 219 MPa  
C. 336 MPa      D. 416 MPa
- 137.** A rod of length 2 m and diameter 50 mm is elongated by 5 mm when an axial force of 400 kN is applied. The modulus of elasticity of the material of the rod will be nearly
- A. 66 GPa  
B. 72 GPa  
C. 82 GPa  
D. 96 GPa

- 138.** A beam of span 3 m and width 90 mm is loaded as shown in the figure. If the allowable bending stress is 12 MPa the minimum depth required for the beam will be

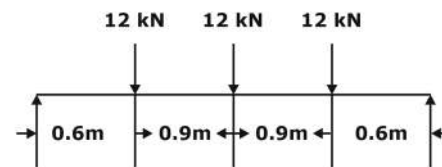

- A. 218 mm      B. 246 mm  
C. 318 mm      D. 346 mm
- 139.** A vertical hollow aluminium tube 2.5 m high fixed at the lower end, must support a lateral load 12 kN at its upper end. If the wall thickness is  $\frac{1}{8}$ th of the outer diameter and the allowable bending stress is 50 MPa, the inner diameter will be nearly
- A. 186 mm  
B. 176 mm  
C. 166 mm  
D. 156 mm



- 140.** A wooden beam AB supporting two concentrated loads P has a rectangular cross-section of width = 100 mm and height = 150 mm. The distance from each end of the beam to the nearest load is 0.5 m. If the allowable stress in bending is 11 MPa and the beam weight is negligible, the maximum permissible load will be nearly
- A. 5.8 kN                      B. 6.6 kN  
C. 7.4 kN                      D. 8.2 kN
- 141.** Which of the following statements regarding thin and thick cylinders, subjects to internal pressure only, are correct?
1. A cylinder is considered thin when the ratio of its inner diameter to the wall thickness is less than 15.
  2. In thick cylinders, tangential stress has highest magnitude at the inner surface of the cylinder and gradually decreases towards the outer surface.
- A. 1 only                      B. 2 only  
C. Both 1 and 2              D. Neither 1 nor 2
- 142.** A cylindrical storage tank has an inner diameter of 600 mm and a wall thickness of 18 mm. The transverse and longitudinal strains induced are  $255 \times 10^{-6}$  mm/mm and  $60 \times 10^{-6}$  mm/mm, and if G is 77 GPa, the gauge pressure inside the tank will be
- A. 2.4 MPa                      B. 2.8 MPa  
C. 3.2 MPa                      D. 3.6 MPa
- 143.** A compressed air spherical tank having inner diameter of 450 mm and a wall thickness of 7 mm is formed by welding. If the allowable shear stress is 40 MPa, the maximum permissible air pressure in the tank will be nearly
- A. 3 MPa                        B. 5 MPa  
C. 7 MPa                        D. 9 MPa
- 144.** A solid bar of circular cross-section having a diameter of 40 mm and length of 1.3 m is subjected to torque of 340 N.m. If the shear modulus of elasticity is 80 GPa, the angle of twist between the ends will be
- A.  $1.26^\circ$                       B.  $1.32^\circ$   
C.  $1.38^\circ$                       D.  $1.44^\circ$
- 145.** Which one of the following statements regarding screw dislocation is correct?
- A. It lies parallel to its Burger vector.  
B. It moves in the direction parallel to its Burgers vector.  
C. It initially requires very less force to move.  
D. It moves very fast as compared to edge dislocation.
- 146.** The percentage of pearlite in a slowly cooled melt of 0.5% carbon steel is
- A. 48.5%  
B. 52.5%  
C. 58.5%  
D. 62.5%
- 147.** In the study of phase diagrams, the rule which helps to calculate the relative proportions of liquid and solid material present in the mixture at any given temperature is known as
- A. Hume -Rothery rule  
B. Lever rule  
C. Gibb's phase rule  
D. Empirical rule
- 148.** The phenomenon that artificially increases the dielectric constant of plastics containing fillers is known as
- A. Gamma polarization  
B. Interfacial polarization  
C. Post-forming drawing  
D. Reinforcement drawing

**149.** The addition of alloying elements nickel to cast iron will primarily improve

- A. Wear resistance
- B. Toughness
- C. Carbide formation
- D. Machinability

**150.** A unidirectional fibre-epoxy composite contains 65% by volume fibre and 35% epoxy resin, If the relative density of the fibre is 1.48 and of the resin is 1.2, the percentage weight of fibre will be nearly

- A. 70%
- B. 75%
- C. 80%
- D. 85%

\*\*\*\*

## Benefits of Online Classroom Program

### 1. GATE Learning Tablet

- › Access high-quality classes at your convenience, anywhere and anytime with the tablet

### 2. Live Classroom Sessions

- › Get Access to Live Classes By India's Leading GATE Faculty

### 3. Previous Year Question Books

- › 20+ Years PYQs with Solutions

### 4. Workbooks

- › Access to 3000+ Practice Questions with solutions

### 5. Regular Quizzes

- › Sample Quizzes for daily practice and regular tests along with live class

### 6. Doubt Resolution

- › Complete Doubt Resolution within 24 hours by Subject Experts

## Additional Offerings

- › **Test Series** - Mock Tests based on GATE Exam pattern
- › **Preparation Guidance** - Get a competitive advantage from our Experts
- › **Subject wise formula Notes** - Comprehensive short notes for Revision
- › **Report Card** - Regular performance analysis along with Live Class