

# GATE 2019

## Set-1

Mechanical Engineering


Questions



## SECTION: GENERAL APTITUDE

1. The sum and product of two integers are 26 and 165 respectively. The difference between these two integers is \_\_\_\_\_.  
 A. 2                                      B. 4  
 C. 6                                      D. 3
2. John Thomas, an \_\_\_\_\_ writer, passed away in 2018.  
 A. prominent                              B. imminent  
 C. eminent                                D. dominant
3. The minister avoided any mention of the issue of women's reservation in the private sector. He was accused of \_\_\_\_\_ the issue.  
 A. skirting                                B. tying  
 C. belting                                 D. collaring
4. A worker noticed that the hour hand on the factory clock had moved by 225 degrees during her stay at the factory. For how long did she stay in the factory?  
 A. 7.5 hours  
 B. 4 hours and 15 mins  
 C. 3.75 hours  
 D. 8.5 hours
5. \_\_\_\_\_ I permitted him to leave, I wouldn't have had any problem with him being absent, \_\_\_\_\_ I?  
 A. Have, wouldn't                      B. Had, wouldn't  
 C. Have, would                         D. Had, would
6. A firm hires employees at five different skill levels P, Q, R, S, T. The shares of employment at these skill levels of total employment in 2010 is given in the pie chart as shown. There were a total of 600 employees in 2010 and the total employment increased by 15% from 2010 to 2016. The total employment at skill levels P, Q and R remained unchanged during this period. If the employment at skill level S

increased by 40% from 2010 to 2016, how many employees were there at skill level T in 2016?

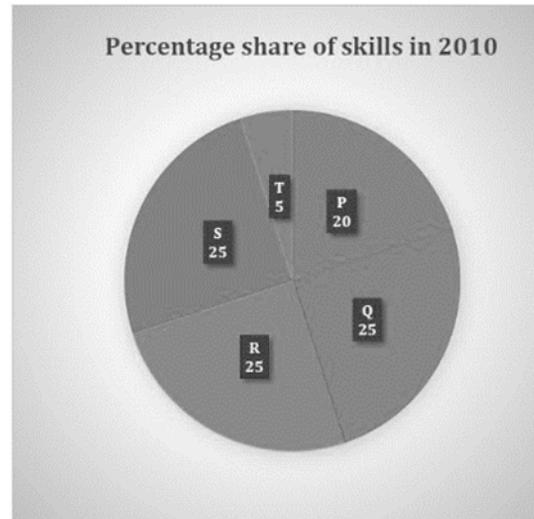


- A. 30                                      B. 72  
 C. 60                                      D. 35
7. M and N had four children P, Q, R and S. Of them, only P and R were married. They had children X and Y respectively. If Y is a legitimate child of W, which one of the following statements is necessarily FALSE?  
 A. W is the wife of R  
 B. W is the wife of P  
 C. M is the grandmother of Y  
 D. R is the father of Y
8. Congo was named by Europeans. Congo's dictator Mobuto later changed the name of the country and the river to Zaire with the objective of Africanising names of persons and spaces. However, the name Zaire was a Portuguese alteration of Nzadi o Nzere, a local African term meaning 'River that swallows Rivers'. Zaire was the Portuguese name for the Congo river in the 16th and 17th centuries. Which one of the following statements can be inferred from the paragraph above?


- A. Mobuto was not entirely successful in Africanising the name of his country
- B. The term Nzadi o Nzere was of Portuguese origin
- C. As a dictator Mobuto ordered the Portuguese to alter the name of the river to Zaire
- D. Mobuto's desire to Africanise names was prevented by the Portuguese
- 9.** A person divided an amount of Rs. 100,000 into two parts and invested in two different schemes. In one he got 10% profit and in the other he got 12%. If the profit percentages are interchanged with these investments he would have got Rs. 120 less. Find the ratio between his investments in the two schemes.
- A. 47 : 53
- B. 9 : 16
- C. 37 : 63
- D. 11 : 14
- 10.** Under a certain legal system, prisoners are allowed to make one statement. If their statement turns out to be true then they are hanged. If the statement turns out to be false then they are shot. One prisoner made a statement and the judge had no option but to set him free. Which one of the following could be that statement?
- A. I will be shot
- B. I did not commit the crime
- C. You committed the crime
- D. I committed the crime

**MECHANICAL ENGINEERING**

1. A solid cube of side 1 m is kept at a room temperature of 32°C. The coefficient of linear thermal expansion of the cube material is  $1 \times 10^{-5} / ^\circ\text{C}$  and the bulk modulus is 200 GPa. If the cube is constrained all around and heated uniformly to 42°C, then the magnitude of volumetric (mean) stress (in MPa) induced due to heating is \_\_\_\_\_.
2. Evaluation of  $\int_2^4 x^3 dx$  using a 2-equal-segment trapezoidal rule gives a value of \_\_\_\_\_
3. A spur gear with 20° full depth teeth is transmitting 20 kW at 200 rad/s. The pitch circle diameter of the gear is 100 mm. The magnitude of the force applied on the gear in the radial direction is  
 A. 1.39 kN                      B. 0.73 kN  
 C. 0.36 kN                      D. 2.78 kN
4. In a casting process, a vertical channel through which molten metal flows downward from pouring basin to runner for reaching the mold cavity is called  
 A. riser                              B. pin hole  
 C. sprue                              D. blister
5. Consider the stress-strain curve for an ideal elastic-plastic strain hardening metal as shown in the figure. The metal was loaded in uniaxial tension from O. Upon loading, the stress-strain curve passes through initial yield point at P, and then strain hardens to point Q, where the loading was stopped. From point Q, the specimen was unloaded to point R, where the stress is zero. If the same specimen is reloaded in tension from point R, the value of stress at which the material yields again is \_\_\_\_\_ MPa.

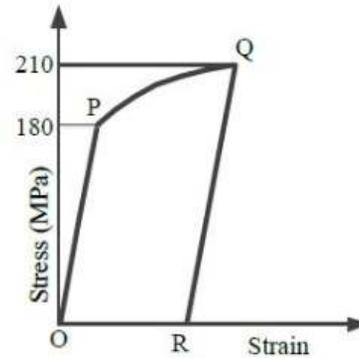

6. The length, width and thickness of a steel sample are 400 mm, 40 mm and 20 mm, respectively. Its thickness needs to be uniformly reduced by 2 mm in a single pass by using horizontal slab milling. The milling cutter (diameter: 100 mm, width: 50 mm) has 20 teeth and rotates at 1200 rpm. The feed per tooth is 0.05 mm. The feed direction is along the length of the sample. If the over-travel distance is the same as the approach distance, the approach distance and time taken to complete the required machining task are  
 A. 21 mm, 28.9 s              B. 14 mm, 21.4 s  
 C. 21 mm, 39.4 s              D. 14 mm, 18.4 s
7. A block of mass 10 kg rests on a horizontal floor. The acceleration due to gravity is 9.81 m/s<sup>2</sup>. The coefficient of static friction between the floor and the block is 0.2. A horizontal force of 10 N is applied on the block as shown in the figure. The magnitude of force of friction (in N) on the block is \_\_\_\_\_




8. The table presents the demand of a product. By simple three-months moving average method, the demand-forecast of the product for the month of September is

Month	Demand
January	450
February	440
March	460
April	510
May	520
June	495
July	475
August	560


- A. 510                                      B. 536.67  
 C. 490                                      D. 530

9. For a hydrodynamically and thermally fully developed laminar flow through a circular pipe of constant cross-section, the Nusselt number at constant wall heat flux ( $Nu_q$ ) and that at constant wall temperature ( $Nu_T$ ) are related as  
 A.  $Nu_q > Nu_T$                       B.  $Nu_q < Nu_T$   
 C.  $Nu_q = (Nu_T)^2$                   D.  $Nu_q = Nu_T$
10. Air of mass 1 kg, initially at 300 K and 10 bar, is allowed to expand isothermally till it reaches a pressure of 1 bar. Assuming air as an ideal gas with gas constant of 0.287 kJ/kg.K, the change in entropy of air (in kJ/kg.K, round off to two decimal places) is \_\_\_\_\_
11. The natural frequencies corresponding to the spring-mass systems I and II are  $\omega_I$  and  $\omega_{II}$ , respectively. The ratio  $\frac{\omega_I}{\omega_{II}}$  is

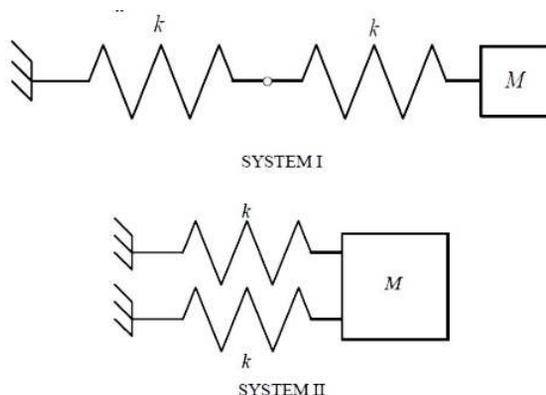

- A.  $\frac{1}{4}$                                       B. 4  
 C.  $\frac{1}{2}$                                       D. 2

12. As per common design practice, the three types of hydraulic turbines, in descending order of flow rate, are  
 A. Pelton, Francis, Kaplan  
 B. Francis, Kaplan, Pelton  
 C. Kaplan, Francis, Pelton  
 D. Pelton, Kaplan, Francis
13. During a high cycle fatigue test, a metallic specimen is subjected to cyclic loading with a mean stress of +140 MPa, and a minimum stress of -70 MPa. The R-ratio (minimum stress to maximum stress) for this cyclic loading is \_\_\_\_\_ (round off to one decimal place)
14. A cylindrical rod of diameter 10 mm and length 1.0 m is fixed at one end. The other end is twisted by an angle of  $10^\circ$  by applying a torque. If the maximum shear strain in the rod is  $p \times 10^{-3}$ , then p is equal to \_\_\_\_\_ (round off to two decimal places).
15. A flat-faced follower is driven using a circular eccentric cam rotating at a constant angular velocity  $\omega$ . At time  $t = 0$ , the vertical position of the follower is  $y(0) = 0$ , and the system is in the configuration shown below.

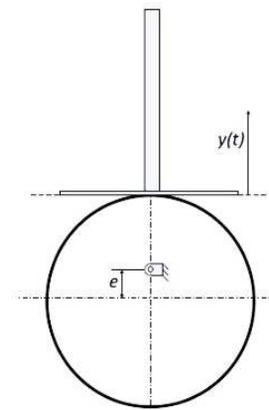

The vertical position of the follower face,  $y(t)$  is given by

- A.  $e(1 + \cos 2\omega t)$       B.  $e(1 - \cos \omega t)$   
 C.  $e \sin \omega t$                   D.  $e \sin 2\omega t$

**16.** The lengths of a large stock of titanium rods follow a normal distribution with a mean ( $\mu$ ) of 440 mm and a standard deviation ( $\sigma$ ) of 1 mm. What is the percentage of rods whose lengths lie between 438 mm and 441 mm?

- A. 99.75%                          B. 81.85%  
 C. 86.64%                          D. 68.4%

**17.** Consider the matrix

$$P = \begin{bmatrix} 1 & 1 & 0 \\ 0 & 1 & 1 \\ 0 & 0 & 1 \end{bmatrix}$$

The number of distinct eigenvalues of P is

- A. 1                                      B. 0  
 C. 3                                      D. 2

**18.** During a non-flow thermodynamic process (1-2) executed by a perfect gas, the heat interaction is equal to the work interaction ( $Q_{1-2} = W_{1-2}$ ) when the process is

- A. Adiabatic                          B. Isentropic  
 C. Isothermal                          D. Polytropic

**19.** Which one of the following welding methods provides the highest heat flux ( $W/mm^2$ )?

- A. Laser beam welding  
 B. Oxy-acetylene gas welding  
 C. Plasma arc welding  
 D. Tungsten inert gas welding


**20.** For the equation  $\frac{dy}{dx} + 7x^2y = 0$ , if  $y(0) = 3/7$ , then the value of  $y(1)$  is

- A.  $\frac{3}{7}e^{-3/7}$                           B.  $\frac{7}{3}e^{-7/3}$   
 C.  $\frac{3}{7}e^{-7/3}$                           D.  $\frac{7}{3}e^{-3/7}$

**21.** A slender rod of length L, diameter d ( $L \gg d$ ) and thermal conductivity  $k_1$  is joined with another rod of identical dimensions, but of thermal conductivity  $k_2$ , to form a composite cylindrical rod of length 2L. The heat transfer in radial direction and contact resistance are negligible. The effective thermal conductivity of the composite rod is

- A.  $k_1 + k_2$                           B.  $\frac{2k_1k_2}{k_1 + k_2}$   
 C.  $\sqrt{k_1k_2}$                           D.  $\frac{k_1k_2}{k_1 + k_2}$

**22.** A parabola  $x = y^2$  with  $0 \leq x \leq 1$  is shown in the figure. The volume of the solid of rotation obtained by rotating the shaded area by  $360^\circ$  around the x-axis is

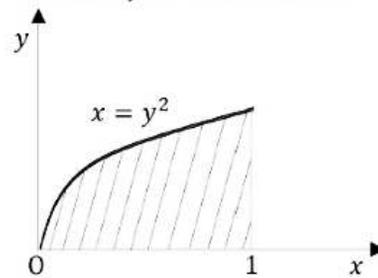


- A.  $\frac{\pi}{2}$                                       B.  $2\pi$   
 C.  $\pi$                                       D.  $\frac{\pi}{4}$

**23.** Consider an ideal vapor compression refrigeration cycle. If the throttling process is replaced by an isentropic expansion process, keeping all the other processes unchanged, which one of the following statements is true for the modified cycle?

- A. Coefficient of performance is the same as that of the original cycle.  
 B. Coefficient of performance is lower than that of the original cycle.

- C. Coefficient of performance is higher than that of the original cycle.
- D. Refrigerating effect is lower than that of the original cycle.

24. The position vector  $\vec{OP}$  of point P(20, 10) is rotated anti-clockwise in X-Y plane by an angle  $\theta = 30^\circ$  such that point P occupies position Q, as shown in the figure. The coordinates (x, y) of Q are

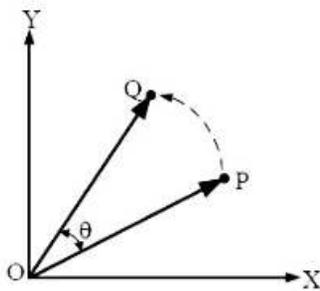

- A. (18.66, 12.32)      B. (22.32, 8.26)
- C. (12.32, 18.66)      D. (13.40, 22.32)


25. Water flows through a pipe with a velocity given by  $\vec{V} = \left(\frac{4}{t} + x + y\right)\hat{j}$  m/s, where  $\hat{j}$  is the unit vector in the y direction,  $t(> 0)$  is in seconds, and x and y are in meters. The magnitude of total acceleration at the point (x, y) = (1, 1) at  $t = 2$  s is \_\_\_\_\_ m/s<sup>2</sup>.

26. In a UTM experiment, a sample of length 100 mm, was loaded in tension until failure. The failure load was 40 kN. The displacement, measured using the cross-head motion, at failure, was 15 mm. The compliance of the UTM is constant and is given by  $5 \times 10^{-8}$  m/N. The strain at failure in the sample is \_\_\_\_\_ %.

27. At a critical point in a component, the state of stress is given as  $\sigma_{xx} = 100$  MPa,  $\sigma_{yy} = 220$  MPa,  $\sigma_{xy} = \sigma_{yx} = 80$  MPa and all other stress components are zero. the yield strength of the material is 468 MPa. The factor of safety on the

basis of maximum shear stress theory is \_\_\_\_\_ (round off to one decimal place).

28. A single block brake with a short shoe and torque capacity of 250 N-m is shown. The cylindrical brake drum rotates anticlockwise at 100 rpm and the coefficient of friction is 0.25. The value of a, in mm (round off to one decimal place), such that maximum actuating force P is 2000 N, is \_\_\_\_\_

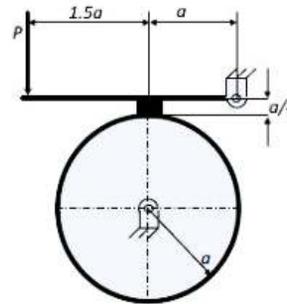


29. Five jobs (J1, J2, J3, J4 and J5) need to be processed in a factory. Each job can be assigned to any of the five different machines (M1, M2, M3, M4 and M5). The time durations taken (in minutes) by the machines for each of the jobs, are given in the table. However, each job is assigned to a specific machine in such a way that the total processing time is minimum. The total processing time is \_\_\_\_\_ minutes.

	M1	M2	M3	M4	M5
J1	40	30	50	50	58
J2	26	38	60	26	38
J3	40	34	28	24	30
J4	28	40	40	32	48
J5	28	32	38	22	44

30. Consider a prismatic straight beam of length  $L = nm$ , pinned at two ends as shown in the figure. The beam has a square cross-section of side  $p = 6$  mm. The Young's modulus  $E = 200$  GPa, and the coefficient of thermal expansion


$\alpha = 3 \times 10^{-6} \text{ K}^{-1}$ . The minimum temperature rise required to cause Euler buckling of the beam is \_\_\_\_\_ K.

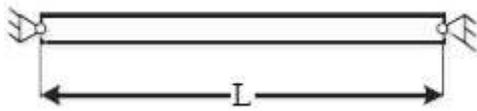

- 31.** Two immiscible, incompressible, viscous fluids having same densities but different viscosities are contained between two infinite horizontal parallel plates, 2 m apart as shown below. The bottom plate is fixed and the upper plate moves to the right with a constant velocity of 3 m/s. With the assumptions of Newtonian fluid, steady, and fully developed laminar flow with zero pressure gradient in all directions, the momentum equations simplify to


$$\frac{d^2u}{dy^2} = 0.$$

If the dynamic viscosity of the lower fluid,  $\mu_2$ , is twice that of the upper fluid,  $\mu_1$ , then the velocity at the interface (round off to two decimal places) is \_\_\_\_\_ m/s.

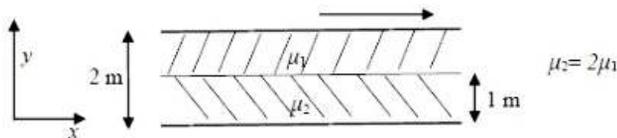


- 32.** If one mole of  $\text{H}_2$  gas occupies a rigid container with a capacity of 1000 litres and the temperature is raised from  $27^\circ\text{C}$  to  $37^\circ\text{C}$ , the change in pressure of the contained gas (round off to two decimal places), assuming ideal gas behaviour, is \_\_\_\_\_ Pa. ( $R = 8.314 \text{ J/mol.K}$ )
- 33.** A car having weight  $W$  is moving in the direction as shown in the figure. The center of gravity (CG) of the car is located at height  $h$  from the ground, midway between the front and rear wheels. The distance between the

front and rear wheels is  $l$ . The acceleration of the car is  $a$ , and acceleration due to gravity is  $g$ . The reactions on the front wheels ( $R_f$ ) and rear wheels ( $R_r$ ) are given by

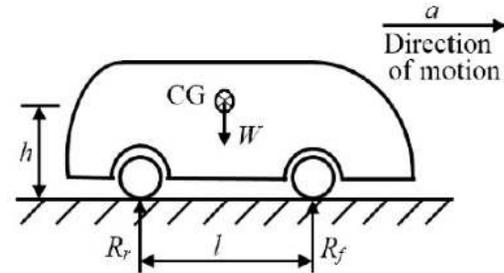

- A.  $R_f = R_r = \frac{W}{2} + \frac{W}{g} \left( \frac{h}{l} \right) a$
- B.  $R_f = \frac{W}{2} + \frac{W}{g} \left( \frac{h}{l} \right) a; R_r = \frac{W}{2} - \frac{W}{g} \left( \frac{h}{l} \right) a$
- C.  $R_f = \frac{W}{2} - \frac{W}{g} \left( \frac{h}{l} \right) a; R_r = \frac{W}{2} + \frac{W}{g} \left( \frac{h}{l} \right) a$
- D.  $R_f = R_r = \frac{W}{2} - \frac{W}{g} \left( \frac{h}{l} \right) a$
- 34.** In a four bar planar mechanism shown in the figure,  $AB = 5 \text{ cm}$ ,  $AD = 4 \text{ cm}$  and  $DC = 2 \text{ cm}$ . In the configuration shown, both  $AB$  and  $DC$  are perpendicular to  $AD$ . The bar  $AB$  rotates with an angular velocity of  $10 \text{ rad/s}$ . The magnitude of angular velocity (in  $\text{rad/s}$ ) of bar  $DC$  at this instant is

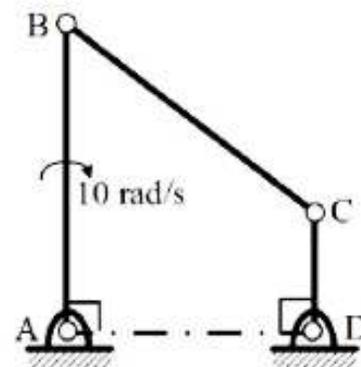


- A. 0  
B. 15  
C. 10  
D. 25


- 35.** The variable  $x$  takes a value between 0 and 10 with uniform probability distribution. The variable  $y$  takes a value between 0 and 20 with uniform probability distribution. The probability of the sum of variables ( $x + y$ ) being greater than 20 is
- A. 0.33                      B. 0  
C. 0.25                      D. 0.50
- 36.** The value of the following definite integral is \_\_\_\_\_ (round off to three decimal places)
- $$\int_1^e (x \ln x) dx$$
- 37.** In orthogonal turning of a cylindrical tube of wall thickness 5 mm, the axial and the tangential cutting forces were measured as 1259 N and 1601 N, respectively. The measured chip thickness after machining was found to be 0.3 mm. The rake angle was  $10^\circ$  and the axial feed was 100 mm/min. the rotational speed of the spindle was 1000 rpm. Assuming the material to be perfectly and Merchant's first solution, the shear strength of the material is closest to
- A. 722 MPa                      B. 200 MPa  
C. 920 MPa                      D. 875 MPa
- 38.** Match the following sand mold casting defects with their respective causes.

Defect		Cause	
P	Blow hole	1	Poor collapsibility
Q	Misrun	2	Mold erosion
R	Hot tearing	3	Poor permeability
S	Wash	4	Insufficient fluidity

- A. P-4, Q-3, R-1, S-2  
B. P-2, Q-4, R-1, S-3  
C. P-3, Q-4, R-1, S-2  
D. P-3, Q-4, R-2, S-1
- 39.** A circular shaft having diameter  $65.00^{+0.01}_{-0.05}$  mm is manufactured by turning process. A 50  $\mu\text{m}$  thick coating of TiN is deposited on the shaft. Allowed variation in TiN film thickness is  $\pm 5 \mu\text{m}$ . The minimum hole diameter (in mm) to just provide clearance fit is
- A. 64.95                      B. 65.12  
C. 65.10                      D. 65.01
- 40.** Three slabs are joined together as shown in the figure. There is no thermal contact resistance at interfaces. The center slab experiences a non-uniform internal heat generation with an average value equal to  $10000 \text{ Wm}^{-3}$ , while the left and right slabs have no internal heat generation. All slabs have thickness equal to 1 m and thermal conductivity of each slab is equal to  $5 \text{ Wm}^{-1}\text{K}^{-1}$ . The two extreme faces are exposed to fluid with heat transfer coefficient  $100 \text{ Wm}^{-2}\text{K}^{-1}$  and bulk temperature  $30^\circ\text{C}$  as shown. The heat transfer in the slabs is assumed to be one dimensional and steady, and all properties are constant. If the left extreme face temperature  $T_1$  is measured to be  $100^\circ\text{C}$ , the right extreme face temperature  $T_2$  is \_\_\_\_\_ $^\circ\text{C}$ .

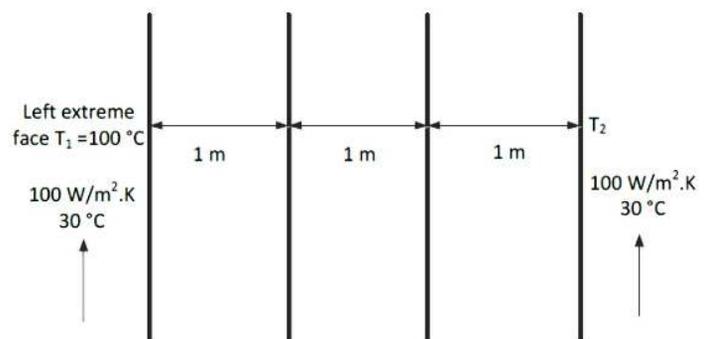


- 41.** A cube of side 100 mm is placed at the bottom of an empty container on one of its faces. The density of the cube is  $800 \text{ kg/m}^3$ , Liquid of density  $1000 \text{ kg/m}^3$  is now poured into the container. The minimum height to which the liquid needs to be poured into the container for the cube to just lift up is \_\_\_\_\_ mm.
- 42.** Consider an elastic straight beam of length  $L = 10 \text{ m}$ , with square cross-section of side  $a = 5 \text{ mm}$ , with Young's modulus  $E = 200 \text{ GPa}$ . This straight beam was bent in such a way that the two ends meet, to form a circle of mean radius  $R$ . Assuming that Euler-Bernoulli beam theory is applicable to this bending problem, the maximum tensile bending stress in the bent beam is \_\_\_\_\_ MPa.

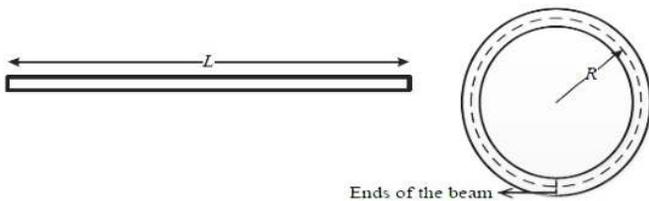

- 43.** The set of equations
- $$x + y + z = 1$$
- $$ax - ay + 3z = 5$$
- $$5x - 3y + ax = 6$$
- has infinite solutions, if  $a =$
- A. 4  
B. -3  
C. -4  
D. 3
- 44.** A gas is heated in a duct as it flows over a resistance heater. Consider a 101 kW electric heating system. The gas enters the heating section of the duct at 100 kPa and  $27^\circ\text{C}$  with a volume flow rate of  $15 \text{ m}^3/\text{s}$ . If heat is lost from the gas in the duct to the surroundings at a rate of 51 kW, the exit temperature of the gas is


(Assume constant pressure, ideal gas, negligible change in kinetic and potential energies and constant specific heat;  $C_p = 1 \text{ kJ/kg K}$ ;  $R = 0.5 \text{ kJ/kg K}$ )

- A.  $37^\circ\text{C}$   
B.  $53^\circ\text{C}$   
C.  $32^\circ\text{C}$   
D.  $76^\circ\text{C}$
- 45.** A harmonic function is analytic if it satisfies the Laplace equation. If  $u(x, y) = 2x^2 - 2y^2 + 4xy$  is a harmonic function, then its conjugate harmonic function  $v(x, y)$  is
- A.  $4y^2 - 4xy + \text{constant}$   
B.  $-4xy + 2y^2 - 2x^2 + \text{constant}$   
C.  $2x^2 - 2y^2 + xy + \text{constant}$   
D.  $4xy - 2x^2 + 2y^2 + \text{constant}$
- 46.** A gas turbine with air as the working fluid has an isentropic efficiency of 0.70 when operating at a pressure ratio of 3. Now, the pressure ratio of the turbine is increased to 5, while maintaining the same inlet conditions. Assume air as a perfect gas with specific heat ratio  $\gamma = 1.4$ . If the specific work output remains the same for both the cases, the isentropic efficiency of the turbine at the pressure ratio of 5 is \_\_\_\_\_ (round off to two decimal places)
- 47.** A plane-strain compression (forging) of a block is shown in the figure. The strain in the  $z$ -direction is zero. The yield strength ( $S_y$ ) in uniaxial tension/compression of the material of the block is 300 MPa and it follows the Tresca (maximum shear stress) criterion. Assume that the entire block has started yielding. At a point where  $\sigma_x = 40 \text{ MPa}$  (compressive) and  $\tau_{xy} = 0$ , the stress component  $\sigma_y$  is

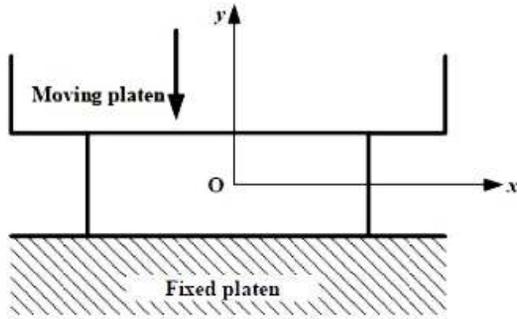

- A. 340 MPa (tensile)
- B. 260 MPa (compressive)
- C. 260 MPa (tensile)
- D. 340 MPa (compressive)

48. A truss is composed of members AB, BC, CD, AD and BD, as shown in the figure. A vertical load of 10 kN is applied at point D. The magnitude of force (in kN) in the member BC is \_\_\_\_\_

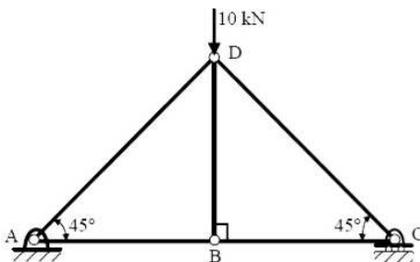


49. A project consists of six activities. The immediate predecessor of each activity and the estimated duration is also provided in the table below:

Activity	Immediate predecessor	Estimated duration (weeks)
P	-	5
Q	-	1
R	Q	2
S	P,R	4
T	P	6
U	S,T	3

If all activities other than S take the estimated amount of time, the maximum duration (in

weeks) of the activity S without delaying the completion of the project is \_\_\_\_\_

50. The wall of a constant diameter pipe of length 1 m is heated uniformly with flux  $q''$  by wrapping a heater coil around it. The flow at the inlet to the pipe is hydrodynamically fully developed. The fluid is incompressible and the flow is assumed to be laminar and steady all through the pipe. The bulk temperature of the fluid is equal to  $0^\circ\text{C}$  at the inlet and  $50^\circ\text{C}$  at the exit. The wall temperatures are measured at three locations, P, Q and R as shown in the figure. The flow thermally develops after some distance from the inlet. The following measurements are made:

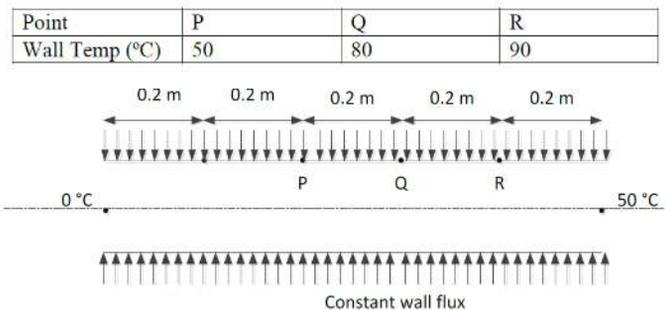


Among the locations P, Q and R, the flow is thermally developed at

- A. P, Q and R
- B. P and Q only
- C. Q and R only
- D. R only

51. A steam power cycle with regeneration as shown below on the T-s diagram employs a single open feedwater heater for efficiency improvement. The fluids mix with each other in an open feedwater heater. The turbine is isentropic and the input (bleed) to the feedwater heater from the turbine is at state 2 as shown in the figure. Process 3-4 occurs in the condenser. The pump work is negligible.


The input to the boiler is at state 5. The following information is available from the steam tables:

State	1	2	3	4	5	6
Enthalpy (kJ/kg)	3350	2800	2300	175	700	1000

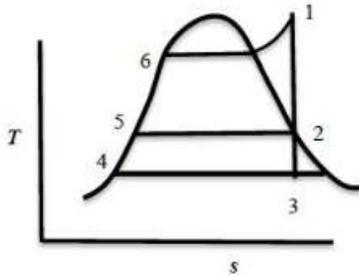

The mass flow rate of steam bled from the turbine as a percentage of the total mass flow rate at the inlet to the turbine at state 1 is \_\_\_\_\_.

- 52.** A uniform thin disk of mass 1 kg and radius 0.1 m is kept on a surface as shown in the figure. A spring of stiffness  $k_1 = 400$  N/m is connected to the disk center A and another spring of stiffness  $k_2 = 100$  N/m is connected at point B just above point A on the circumference of the disk. Initially, both the springs are unstretched. Assume pure rolling of the disk. For small disturbance from the equilibrium, the natural frequency of vibration of the system is \_\_\_\_\_ rad/s (round off to one decimal place).

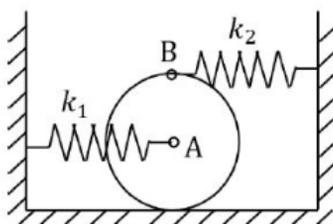

\*\*\*\*

- 53.** Taylor's tool life equation is given by  $VT^n = C$ , where  $V$  is in m/min and  $T$  is in min. In a turning operation, two tools X and Y are used. For tool X,  $n = 0.3$  and  $C = 60$  and for tool Y,  $n = 0.6$  and  $C = 90$ . Both the tools will have the same tool life for the cutting speed (in m/min, round off to one decimal place) of \_\_\_\_\_.
- 54.** The rotor of a turbojet engine of an aircraft has a mass 180 kg and polar moment of inertia  $10 \text{ kg.m}^2$  about the rotor axis. The rotor rotates at a constant speed of 1100 rad/s in the clockwise direction when viewed from the front of the aircraft. The aircraft while flying at a speed of 800 km per hour takes a turn with a radius of 1.5 km to the left. The gyroscopic moment exerted by the rotor on the aircraft structure and the direction of motion of the nose when the aircraft turns, are
- 162.9 N.m and the nose goes down
  - 1629.6 N.m and the nose goes up
  - 1629.6 N.m and the nose goes down
  - 162.9 N.m and the nose goes up
- 55.** In ASA system, the side cutting and end cutting edge angles of a sharp turning tool are  $45^\circ$  and  $10^\circ$ , respectively. The feed during cylindrical turning is 0.1 mm/rev. The center line average surface roughness (in  $\mu\text{m}$ , round off to one decimal place) of the generated surface is \_\_\_\_\_.

## Benefits of Online Classroom Program

### 1. GATE Learning Tablet

- › Access high-quality classes at your convenience, anywhere and anytime with the tablet

### 2. Live Classroom Sessions

- › Get Access to Live Classes By India's Leading GATE Faculty

### 3. Previous Year Question Books

- › 20+ Years PYQs with Solutions

### 4. Workbooks

- › Access to 3000+ Practice Questions with solutions

### 5. Regular Quizzes

- › Sample Quizzes for daily practice and regular tests along with live class

### 6. Doubt Resolution

- › Complete Doubt Resolution within 24 hours by Subject Experts

## Additional Offerings

- › **Test Series** - Mock Tests based on GATE Exam pattern
- › **Preparation Guidance** - Get a competitive advantage from our Experts
- › **Subject wise formula Notes** - Comprehensive short notes for Revision
- › **Report Card** - Regular performance analysis along with Live Class

