

1. Consider the following statements related to road pavements :

1. Deflections measured near cracks are normally much lower than the measurements in non-distressed areas.
2. Deflection measurements near longitudinal joints, transverse joints or corners are higher than those measured at mid-slab for concrete pavements.
3. Thermal and moisture gradient in the vertical direction of concrete slabs does not have any influence on deflection measurements.
4. Measurements taken at night or in the early morning are considerably different from those obtained in the afternoon.

Which of the above statements are **not** correct ?

- (a) 1 and 2 only
- (b) 1 and 3 only
- (c) 2 and 4 only
- (d) 1, 2 and 4 only

2. Which one of the following tunnelling methods is adopted for the situations where the metro alignment passes under residential buildings or a canal ?

- (a) Earth pressure balance tunneling machine method
- (b) Tunnel boring machine method
- (c) Tube tunneling method
- (d) Driven shield tunneling method

3. Consider the following statements related to the advantages of concrete sleepers :

1. Concrete sleepers can generally be mass produced using local resources.
2. Concrete sleepers are not suitable for beater packing.
3. Concrete sleepers have a very long lifespan.
4. Concrete sleepers have no scrap value.

Which of the above statements is/are correct ?

- (a) 1 only
- (b) 1 and 3 only
- (c) 2 only
- (d) 2 and 4 only

4. Which one of the following is **not** the method of tunneling in hard rock ?

- (a) Full-face heading method
- (b) Heading and bench method
- (c) Drift method
- (d) Shaft method

5. Consider the following statements related to the advantages of uniformity of rail gauges :

1. As transhipping is not required, there is breakage of goods.
2. Large sheds to store goods are not required.
3. Labour strikes, etc. do not affect the service and operation of trains.

Which of the above statements are correct ?

- (a) 1 and 2 only
- (b) 2 and 3 only
- (c) 1 and 3 only
- (d) 1, 2 and 3

6. Which one of the following are provided to give access to properties along an important highway with controlled access to expressway or freeway ?
- Lay-bys
  - Frontage roads
  - Driveways
  - Cycle tracks
7. When properly designed traffic signals are used, which one of the following is the advantage of traffic signals ?
- The signals allow crossing of the heavy traffic flow with safety.
  - The rear-end collision may increase.
  - Improper design and location of signals may lead to violation of the control system.
  - Failure of the signal due to electric power failure may cause confusion to the road users.
8. If the ruling gradient is 1 in 150 on a particular section of broad gauge and at the same time a curve of 4 degree is situated on this ruling gradient, what is the allowable ruling gradient ?
- 1 in 10
  - 1 in 72
  - 1 in 196
  - 1 in 245
9. What is the value of headlight sight distance for a highway with a design speed of 65 kmph ? (Take  $f = 0.36$  and  $t = 2.5$  sec)
- 66.5 m
  - 81.3 m
  - 91.4 m
  - 182.8 m
10. What is the minimum stopping sight distance on a  $-3.5\%$  grade for a design speed of 110 kmph ? (Consider friction coefficient  $f = 0.28$ ,  $t = 2.5$  sec and  $G = 0.035$ )
- 76.4 m
  - 194.4 m
  - 214.6 m
  - 270.8 m
11. The free mean speed on a roadway is found to be 80 kmph. Under stopped condition, the average spacing between the vehicles is 6.9 m. What is the capacity flow ?
- 5800 Vehicles/hour (per lane)
  - 7200 Vehicles/hour (per lane)
  - 1450 Vehicles/hour (per lane)
  - 2900 Vehicles/hour (per lane)
12. For a street lighting system, having the following conditions :
- Street width = 15 m
- Mounting height = 7.5 m
- Lamp size = 6000 lumen
- Luminaire type = II
- Coefficient of utilization = 0.44
- Maintenance factor = 0.8
- What is the spacing between lighting units to produce average Lux = 6 ?
- 18 m
  - 20 m
  - 23 m
  - 27 m



13. Consider the following for the objects of seasoning wood :

1. Reduce the shrinkage and warping after placement in structure
2. Increase its tendency to split and decay
3. Decrease workability
4. Reduce its weight

Which of the above objects are correct ?

- (a) 1, 3 and 4 only
- (b) 1 and 4 only
- (c) 1 and 3 only
- (d) 2, 3 and 4 only

14. The hardness of aggregate is tested by

- (a) Impact test
- (b) Crushing strength test
- (c) Abrasion test
- (d) Soundness test

15. Which one of the following statements is correct in respect of mild steel ?

- (a) It has high carbon content.
- (b) It is tougher than hard steel.
- (c) It is more elastic than hard steel.
- (d) It can be forged and welded easily.

16. The void ratio of a clay sample is 0.5 and the degree of saturation is 70%. What is the bulk unit weight of the soil ? (Assume  $G = 2.7$ )

- (a) 10.46 kN/m<sup>3</sup>
- (b) 14.32 kN/m<sup>3</sup>
- (c) 17.77 kN/m<sup>3</sup>
- (d) 19.95 kN/m<sup>3</sup>

17. What is the coefficient of volume change (using change in void ratio method) for pressure range 100 kN/m<sup>2</sup> to 200 kN/m<sup>2</sup> ? (Consider  $\sigma'_0 = 100$  kN/m<sup>2</sup>,  $e_0 = 1.121$ ,  $\sigma' = 200$  kN/m<sup>2</sup>,  $e_0 = 0.964$ ,  $\Delta\sigma' = 100$  kN/m<sup>2</sup> and  $\Delta e = -0.157$ )

- (a) 0.25 m<sup>2</sup>/MN
- (b) 0.48 m<sup>2</sup>/MN
- (c) 0.69 m<sup>2</sup>/MN
- (d) 0.74 m<sup>2</sup>/MN

18. Which one of the following problems is required to be studied in the design of earth dams ?

- (a) The prediction of the position of the line of seepage in the longitudinal section.
- (b) The computation of seepage loss.
- (c) The seepage line should cut the down-stream slope.
- (d) The seepage loss through the dam should be maximum.

19. Which one of the following is **not** an instrument for setting out right angles ?

- (a) Cross staff
- (b) Site square
- (c) Prism square
- (d) Optical staff

20. Which one of the following is correct for Prismatic Compass ?
- The graduated ring rotates with line of sight.
  - Instrument cannot be used without tripod.
  - The graduations are engraved inverted.
  - The readings can directly be taken by seeing through the top of the glass.
21. Magnetic declination at a place is the horizontal angle between
- the true meridian and the arbitrary meridian.
  - the magnetic meridian and the arbitrary meridian.
  - the true bearing and the magnetic bearing.
  - the true meridian and the magnetic meridian.
22. The magnetic bearing of a line AB is  $S28^{\circ}30'E$ . What is the true bearing of line AB if the magnetic declination is  $7^{\circ}30'$  towards west ?
- $S36^{\circ}E$
  - $N21^{\circ}W$
  - $S21^{\circ}E$
  - $N36^{\circ}W$
23. The Zenith is/are
- the point on the upper portion of the celestial sphere marked by plumb line above the observer.
  - the point on the lower portion of the celestial sphere marked by plumb line below the observer.
  - the two points in which the Earth's axis of rotation meets the Earth's sphere.
  - the great circle of the Earth, the plane of which is at right angles to the axis of rotation.
24. Which one of the statements is **not** correct for remote sensing ?
- It requires energy source.
  - It requires propagation of energy through atmosphere.
  - It requires energy interaction with the Earth's surface features.
  - It requires absorption of energy by the Earth's surface.
25. Energy in remote sensing deals with which region of electromagnetic spectrum ?
- Ultraviolet
  - Infrared
  - X-Ray
  - Gamma Ray
26. Consider the following statements related to the classification based upon the object of survey :
- Archaeological surveys for unearthing relics of antiquity.
  - Geological surveys for determining different strata in the Earth's crust.
  - Mine surveys for exploring mineral wealth such as gold, coal, etc.
- Which of the above statements are correct ?
- 1 and 2 only
  - 2 and 3 only
  - 1 and 3 only
  - 1, 2 and 3
27. In setting up of plane table at a station P, the corresponding point on the plan was not accurately centered above P. If the displacement of P was 30 cm in a direction at right angles to the ray and scale is  $1\text{ cm} = 2\text{ m}$ , how much on the plan would be the consequent displacement of point from its true position ?
- 0.15 mm
  - 6.0 mm
  - 1.5 mm
  - 0.3 mm



28. A photographic survey is carried out to a scale of 1 : 20000. A camera with a wide angle lens of  $f = 170$  mm was used with  $25 \text{ cm} \times 25 \text{ cm}$  plate size for a net 65% overlap along the line of flight. What is the error in height given by an error of 0.15 mm in measuring the parallax of the point ?

- (a) 5.15 m
- (b) 5.27 m
- (c) 5.83 m
- (d) 6.45 m

29. What is the aeroplane flying height to obtain the average scale of the photograph equal to  $\frac{1}{7200}$  ? (Ground surface elevations vary from 160 m to 430 m and focal length of the camera lens is 153 mm)

- (a) 1021 m
- (b) 1145 m
- (c) 1284 m
- (d) 1397 m

30.

Which one of the following conditions shall be fulfilled when a transition curve is inserted between the tangent and circular curve ?

- (a) It should not meet the original straight tangentially.
- (b) It should not meet the circular curve tangentially.
- (c) Its radius at the junction with the circular curve should be the same as that of the circular curve.
- (d) The rate of decrease of curvature along the transition curve should be same as that of increase in superelevation.

FGT-B-CVL

(6 - B)

D2 Qamee/nac

31. Consider the following statements regarding channel routing :

1. In channel routing, the flood hydrograph at various sections of the reach is predicted by considering a channel reach and an input hydrograph at the upstream end.
2. As the flood wave moves down the river, the shape of the wave does not change.
3. Flood waves passing down a river have their peaks attenuated due to friction.
4. The addition of lateral inflows can cause an increase of attenuation.

Which of the above statements are *not* correct ?

- (a) 1 and 3 only
- (b) 2 and 3 only
- (c) 1 and 4 only
- (d) 2 and 4 only

32. Consider the following statements related to water logging control :

1. It is evident that water logging can be controlled only if the quantity of water into the soil below is checked and reduced.
2. Attempts should be made to reduce the seepage of water from the canals and water courses.
3. The entire irrigable land should receive canal water in all seasons.

Which of the above statements are correct ?

- (a) 1 and 2 only
- (b) 2 and 3 only
- (c) 1 and 3 only
- (d) 1, 2 and 3

33.

If wheat requires 7.5 cm of water after every 28 days and the base period for wheat is 140 days, what is the value of delta for wheat ?

- (a) 7.5 cm
- (b) 27.5 cm
- (c) 37.5 cm
- (d) 17.5 cm

0.075 m

8.69  
140

12096/0

8.69 B = 8 DXS

b

34. A tile drainage system draining 12 hectares, flows at a design capacity for two days, following a storm. If the system is designed using a drainage coefficient of 1.25 cm, how much of water will be removed during this period ?

- (a) 1500 m<sup>3</sup>
- (b) 4500 m<sup>3</sup>
- (c) 3000 m<sup>3</sup>
- (d) 3500 m<sup>3</sup>

35. What is the hydraulic radius of a stable canal carrying a discharge of 27 m<sup>3</sup>/s using Lacey's method ? (Assume silt factor is 1.0)

- (a) 1.44 m
- (b) 2.67 m
- (c) 3.14 m
- (d) 4.28 m

36. Consider the following statements regarding loss of water in canals :

1. The water lost by evaporation is generally very small, as compared to the water lost by seepage in certain channels.
2. In percolation, there exists a zone of continuous saturation from the canal to the water-table and a direct flow is established.
3. In absorption, a small saturated soil zone exists around the canal section and is surrounded by a zone of decreasing saturation.

Which of the above statements are correct ?

- (a) 1 and 2 only
- (b) 2 and 3 only
- (c) 1 and 3 only
- (d) 1, 2 and 3

37. The chief aim of river training is

- (a) to protect water from loss.
- (b) bed scouring.
- (c) to achieve ultimate stability of river with the aid of river training measures.
- (d) pitching of banks and provision of launching aprons.

38. Which one of the following conditions is correct for a channel to behave in true regime ?

- (a) Discharge is non-uniform
- (b) Flow is non-uniform
- (c) Silt grade is varying
- (d) Silt charge is constant

39. What is the delta for a crop when its duty is 864 hectares/cumec on the field and the base period of this crop is 120 days ?

- (a) 120 cm
- (b) 140 cm
- (c) 160 cm
- (d) 172 cm


$$8.64B = \frac{D}{\Delta}$$

40. Which one of the following is the merit of combined sewer system ?

- (a) Rain water dilutes the sewage, therefore, it can be easily and economically treated.
- (b) Initial cost is high as compared with separate system.
- (c) If the whole sewage is to be disposed off by pumping, it is uneconomical.
- (d) During heavy rains, the overflowing of sewers will endanger the public health.

41. Which one of the following is a device used for measuring the velocity of flowing water in pipes or open channels ?

- (a) Pitot tube
- (b) Piezometer
- (c) Venturimeter
- (d) Venturi tube





42. Which one of the following is the process in which ammonia is oxidised to nitrites and then to nitrates by aerobic bacteria?

- (a) Nitrification
- (b) Denitrification
- (c) Adsorption
- (d) Regeneration

43. A tank into which raw or partly treated sewage is collected, left to stay, and discharged at such a rate as may be necessary for subsequent treatment, is called

- (a) Dosing tank
- (b) Sedimentation tank
- (c) Skimming tank
- (d) Settling tank

44. In the context of sludge conditioning, Elutriation is synonymous to

- (a) Washing
- (b) Heating
- (c) Compacting
- (d) Filtering

45. Sludge thickening is commonly achieved by the following methods:

1. Gravity thickening
2. Air flotation
3. Centrifugation

Which of the above methods are correct?

- (a) 2 and 3 only
- (b) 1 and 2 only
- (c) 1 and 3 only
- (d) 1, 2 and 3

46. A network of pipes conveying water to a city has the following specifications. The diameter of a main pipe is 30 cm and it branches into two pipes of diameters 20 cm and 15 cm respectively. If the average velocity in the main pipe is 2.5 m/s and the average velocity in the 20 cm pipe is measured as 2 m/s, what is the velocity in the 15 cm pipe?

- (a) 8.84 m/s
- (b) 7.44 m/s
- (c) 5.84 m/s
- (d) 6.44 m/s

47. A centrifugal pump delivers water against a net head of 14.5 m and a design speed of 1000 r.p.m. The vanes are curved back to an angle of  $30^\circ$  with the periphery. The impeller diameter is 300 mm and the outlet width is 50 mm. What is the tangential velocity of impeller at outlet?


- (a) 15.7 m/s
- (b) 13.2 m/s
- (c) 9.7 m/s
- (d) 11.2 m/s

48. A 7.5 cm diameter jet of water strikes a curved plate at its centre with a velocity of 20 m/s. The curved plate is moving with a velocity of 8 m/s in the direction of the jet. The jet is deflected through an angle of  $165^\circ$ . By assuming the plate as smooth, what is the angle made by the relative velocity at the outlet of the plate?

- (a)  $45^\circ$
- (b)  $30^\circ$
- (c)  $15^\circ$
- (d)  $0^\circ$

49. A reservoir has a head of 40 m and a channel leading from the reservoir permits a flow rate of  $34 \text{ m}^3/\text{s}$ . If the rotational speed of the rotor is 150 r.p.m., what is the power of the turbine? (Take  $g = 9.81 \text{ m/s}^2$ )

- (a) 14.34 MW
- (b) 13.34 MW
- (c) 12.34 MW
- (d) 11.34 MW

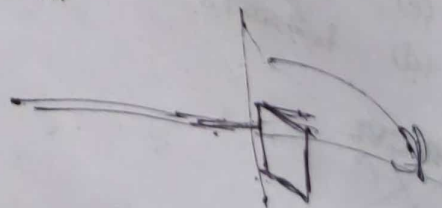

50. A stream function is given by  $\psi = 3x^2 - y^3$ . What is the magnitude of velocity components at the point (2, 1)?

- (a) 8.52
- (b) 9.17
- (c) 10.81
- (d) 12.37

51. Full load is supplied by the turbine shaft when the diameter of jet issuing from the nozzle is 150 mm. If the load suddenly drops to 36% of the full load, what diameter of the jet should be attained by regulating the spear rod?

- (a) 15 mm
- (b) 45 mm
- (c) 90 mm
- (d) 180 mm

52. What is the depth of a point below water surface in sea, where pressure intensity is  $1.006 \text{ MN/m}^2$ ? (Specific gravity of sea water is 1.025)

- (a) 60 m
- (b) 80 m
- (c) 100 m
- (d) 120 m

$\rho g h = 1.006$

53. Two pressure points in a water pipe are connected to a manometer which has the form of an inverted U-tube. The space above the water in the two limbs of the manometer is filled with toluene (specific gravity is 0.875). If the difference of level of water columns in the two limbs reads 12.0 cm, what is the corresponding difference of pressure? (Take  $g = 9.81 \text{ m/s}^2$ )

- (a) 110.49  $\text{N/m}^2$
- (b) 128.12  $\text{N/m}^2$
- (c) 131.34  $\text{N/m}^2$
- (d) 147.15  $\text{N/m}^2$

54. What is the minimum size of glass tube that can be used to measure water level if the capillary rise in the tube is to be restricted to 2 mm? (Take surface tension of water in contact with air as  $0.073575 \text{ N/m}$ )

- (a) 1.5 cm
- (b) 1.0 cm
- (c) 2.5 cm
- (d) 2.0 cm

55. A semi-tubular cylinder of 75 mm radius with concave side upstream (drag coefficient = 2.3) is submerged in flowing water of velocity 0.6 m/s. If the cylinder is 7.2 m long and density of water is  $1000 \text{ kg/m}^3$ , what is the drag?

- (a) 150 N
- (b) 173 N
- (c) 955 N
- (d) 223 N

56. A double acting reciprocating pump having piston area  $0.1 \text{ m}^2$  has a stroke length 0.30 m. The pump is discharging  $2.4 \text{ m}^3$  of water per minute at 45 r.p.m. through a height of 10 m. What is the slip of the pump?

- (a)  $0.005 \text{ m}^3/\text{s}$
- (b)  $0.015 \text{ m}^3/\text{s}$
- (c)  $0.025 \text{ m}^3/\text{s}$
- (d)  $0.035 \text{ m}^3/\text{s}$

$\rho g h = \frac{2.4 \times 1000 \times 9.81 \times 10}{60}$

57. If pressure head of water is 100 m and specific gravity of kerosene is 0.81, what is the pressure head of kerosene?

- (a) 123.5 m of kerosene
- (b) 241.3 m of kerosene
- (c) 75.1 m of kerosene
- (d) 52.4 m of kerosene

$g_2 = 0.81$   
 $0.81 \times 100$   
 $= 81 \Rightarrow \text{Answer}$

FGT-B-CVL

$\frac{p_1}{\gamma} + z_1 + \frac{v_1^2}{2g} = \frac{p_2}{\gamma} + z_2 + \frac{v_2^2}{2g} + h_L$  (9-B)

$\frac{p_1}{\gamma} - \frac{p_2}{\gamma} = 12 +$

$\frac{10000}{81} = \frac{10000}{81} + \frac{123}{1}$

$\frac{190}{81} = 2.3457$

$\frac{162}{81} = 2$

$g.w. \cdot h = \frac{981000}{9.81 \times 0.81}$

$h = \frac{981000 \times 100}{9.81 \times 0.81}$

$=$



15 km  $\approx 15 \times 10^6 \text{ m}^2$   $\approx 1500 \text{ Hae-m}^2$  Area  
58. A lake has an area of  $15 \text{ km}^2$ . Observation of hydrological variables during a certain year has shown as follows :

Precipitation =  $700 \text{ mm/year}$ ;

Average inflow  $Q_{in} = 1.4 \text{ m}^3/\text{s}$ ;

Average outflow  $Q_{out} = 1.6 \text{ m}^3/\text{s}$ .

Assume that there is no net water exchange between the lake and the groundwater. What is the evaporation during this year ?

- (a) 480 mm
- (b) 280 mm
- (c) 380 mm
- (d) 180 mm

59. A bridge has an expected life of 25 years and is designed for a flood magnitude of return period 100 years. What is the risk of this hydrologic design ?

- (a)  $1 - \left(\frac{100}{99}\right)^{25}$
- (b)  $\left(\frac{99}{100}\right)^{25}$
- (c)  $1 - \left(\frac{99}{100}\right)^{25}$
- (d)  $\left(\frac{100}{99}\right)^{25}$

60. In a groundwater field test, a tracer took 8 hours to travel between two observation wells which are 56 m apart. The difference in water table elevations in these wells was 0.70 m. The volume of the void of the aquifer is 30% of the total volume of the aquifer. What is the hydraulic conductivity of the aquifer, if the dynamic viscosity of water is  $0.995 \times 10^{-3} \text{ Ns/m}^2$  ?

- (a) 4.664 cm/s
- (b) 3.664 cm/hr
- (c) 2.664 mm/s
- (d) 1.664 cm/hr

61. Which one of the following is the process whereby chemicals are added to a wastewater resulting in a reduction of the forces tending to keep suspended particles apart ?

- (a) Coagulation
- (b) Flocculation
- (c) Clarification
- (d) Sedimentation

62. Which one of the following is a grit-removal unit which also removes silt as well as some organic matter along with grit ?

- (a) Detritus Tank
- (b) Skimming Tank
- (c) Detention Tank
- (d) Suspension Tank

63. The domestic sewage of a town was tested for total solids and the following results were obtained :

Weight of sample of sewage = 1000 gm

Weight of solids after evaporation of liquid = 0.952 gm

Weight of dry residue after ignition = 0.516 gm

What is the value of volatile solids ?

- (a) 952 ppm
- (b) 516 ppm
- (c) 436 ppm
- (d) 694 ppm

64. The quantity of nitrogen present in wastewater before the decomposition of organic matter has started, is indicated by

- (a) Albuminoid Nitrogen
- (b) Free Ammonia
- (c) Organic Nitrogen
- (d) Nitrate Nitrogen

65. Which one of the following is that (low) water content of the soil at which plants can no longer extract sufficient water for their growth?

- (a) Wilting point
- (b) Tail water
- (c) Irrigating head
- (d) Capillary water

66. Which one of the following is the advantage of using activated carbon for water treatment?

- (a) When used in powdered form after coagulation, it does not aid in coagulation.
- (b) It increases the chlorine demand of treated water.
- (c) It removes organic matter present in water.
- (d) Its overdose is harmful.

67. A soil has bulk density of  $20.1 \text{ kN/m}^3$  and water content 15%. What is the water content if the soil partially dries to a density of  $19.4 \text{ kN/m}^3$  and the void ratio remains unchanged?

- (a) 10.86%
- (b) 10.76%
- (c) 10.68%
- (d) 10.66%

$$\frac{20.1}{1.15} = \frac{19.4}{1 + e}$$

$$1 + e = 10.7$$

68. A fine grained soil is found to have a liquid limit of 90% and a plasticity index of 50. The natural water content is 28%. What is the liquidity index?

- (a) -0.34
- (b) -0.14
- (c) -0.24
- (d) -2.40

$$\frac{WL - w_p}{IP} = \frac{90 - 50}{50} = 0.8$$

$$\frac{90 - w}{50} = 0.8$$

$$90 - w = 40$$

$$w = 50$$

(11-B)

69. A concentrated load of 2000 kN is applied at the ground surface. What is the vertical stress at a point 6 m directly below the load?

- (a)  $16.42 \text{ kN/m}^2$
- (b)  $26.53 \text{ kN/m}^2$
- (c)  $36.12 \text{ kN/m}^2$
- (d)  $40.51 \text{ kN/m}^2$

2000 = 20 kN

$$\frac{2000}{6 \times 1} = 333.33$$

70. Which one of the following is a characteristic of local shear failure?

- (a) Failure pattern is not clearly defined.
- (b) Failure surfaces reach ground surfaces.
- (c) There is no bulging of soil around the footing.
- (d) Failure is not sudden and there is no tilting of footing.

71. A sample of silty clay has a volume of  $14.88 \text{ cm}^3$ , a total mass of 28.81 gm, a dry mass of 24.83 gm and a specific gravity of solids 2.7. What is the void ratio?

- (a) 0.412
- (b) 0.521
- (c) 0.618
- (d) 0.663

$$V_s = \frac{M_s}{G_s} = \frac{24.83}{2.7} = 9.196 \text{ cm}^3$$

$$V_v = V - V_s = 14.88 - 9.196 = 5.684 \text{ cm}^3$$

$$e = \frac{V_v}{V_s} = \frac{5.684}{9.196} = 0.618$$

72. A constant head permeability test is carried out on a cylindrical sample of sand 10 cm diameter and 15 cm height.  $160 \text{ cm}^3$  of water is collected in 1.75 minutes, under a head of 30 cm. What is the coefficient of permeability in m/year?

- (a) 1257 m/year
- (b) 2111 m/year
- (c) 3060 m/year
- (d) 3332 m/year

$$k = \frac{Q}{A \cdot h \cdot t} = \frac{160}{\pi \cdot 5^2 \cdot 15 \cdot 1.75} = 0.62$$

$$k = 0.62 \text{ cm/s} = 0.62 \times 60 \times 60 \times 24 \times 365 = 3060 \text{ m/year}$$



73. Which one of the following is the correct assumption of Rankine's theory?

- (a) The soil mass is infinite.
- (b) The soil mass is non homogeneous.
- (c) The soil mass is cohesive.
- (d) The ground surface is a plane which may be horizontal or inclined.

74. If a retaining wall 5 m high is restrained from yielding, what is the at-rest earth pressure per meter length of wall? (Consider the backfill is cohesionless soil having  $\phi = 30^\circ$  and  $\gamma = 18 \text{ kN/m}^3$ )

- (a) 108 kN/m
- (b) 112.5 kN/m
- (c) 115 kN/m
- (d) 124 kN/m

75. Consider the following steps related to construction with the use of geotextiles:

1. Start with an adequate working surface and staging area.
2. Lay a geotextile sheet of proper width on the ground surface.
3. Construction equipment must work from the soil backfill and be kept off the unprotected geotextile.

Which of the above steps are correct?

- (a) 1 and 2 only
- (b) 2 and 3 only
- (c) 1 and 3 only
- (d) 1, 2 and 3

76. Which one of the following statements is *not* correct in respect of drawing network?

- (a) No activity can start until its tail event has occurred.
- (b) An event cannot occur twice.
- (c) Length of arrow should be in proportion to the time consumed by that activity.
- (d) The number of arrows should be equal to the number of activities in the project.

77. A-O-N system of network

- (a) completely eliminates the use of dummy activities.
- (b) requires judicious use of dummy activities.
- (c) does not distinctly show pre-operation and post-operation of the activities.
- (d) is not suitable for projects with large number of activities.

78. Which one of the following types of cost-plus contracts allows the amount of the re-imbusement to increase if the contractor's cost increases?

- (a) Cost-plus award fee contract
- (b) Cost-plus incentive fee contract
- (c) Cost-plus fixed fee contract
- (d) Cost-plus percentage fee contract

79. Number of bricks required for 15 cu.m of brickwork is approximately

- (a) 6750
- (b) 7200
- (c) 7500
- (d) 6000

80. The plinth area of a building does **not** include area of
- the walls at the floor levels.
  - internal shaft for sanitary installations upto 2 sq.m area.
  - lifts.
  - cantilevered porches.

81. Which one of the following statements is **not** correct ?

- The circulation area of any floor includes entrance halls.
- Floor area of a building includes area of sills of doors and other openings.
- Cube rate estimate of a building is more accurate as compared to plinth area estimate.
- The preliminary estimate for water supply and sewerage project can be prepared on the basis of per head of population served.

82. Consider the following statements regarding the advantages in Line or Military Organization of management technique :

- The command and control is very effective.
- It is simple to work and easily understood by the employees.
- Responsibilities in all levels are definite and fixed.
- The organization is rigid.

Which of the above statements are correct ?

- 1, 2 and 3 only
- 2, 3 and 4 only
- 1, 2 and 4 only
- 1, 3 and 4 only

83. Project management audit consists of which of the following ?

- Project work-breakdown structure verification and the relevance.
- Risk identification, cost, levels and security.
- Measurements of risk impacts.

Select the correct answer using the code given below :

- 1 and 2 only
- 2 and 3 only
- 1, 2 and 3
- 1 and 3 only

84. Consider the following statements regarding inspection and quality control :

- Coefficient of variation is a relative measure of dispersion.
- Standard deviation is the root mean square of the deviation of all the results.
- Standard deviation is relative measure of dispersion.
- Lower value of standard deviation indicates low degree of uniformity of observations.

Which of the above statements are correct ?

- 1 and 4 only
- 2 and 3 only
- 1 and 2 only
- 2 and 4 only



**Directions :** Each of the next six (06) items consists of two statements, one labelled as the 'Statement (I)' and the other as 'Statement (II)'. You are to examine these two statements carefully and select the answers to these items using the codes given below :

**Codes :**

- (a) Both Statement (I) and Statement (II) are individually true and Statement (II) is the correct explanation of Statement (I)
- (b) Both Statement (I) and Statement (II) are individually true, but Statement (II) is **not** the correct explanation of Statement (I)
- (c) Statement (I) is true, but Statement (II) is false
- (d) Statement (I) is false, but Statement (II) is true

85. **Statement (I) :**

The theoretical strength of concrete as per Gel-Space ratio theory is less than the actual strength of concrete.

**Statement (II) :**

In the Gel-Space ratio theory, it has been assumed that the concrete is perfectly homogeneous and flawless.

86. **Statement (I) :**

Spur length is kept longer than 1.5 to 2 times the depth of flow.

**Statement (II) :**

Shorter spur length in deeper rivers induces swirling motion on both the upstream and downstream sides of the spur.

87. **Statement (I) :**

Both the Empirical formulae given by American Insurance Association and Busto for the determination of fire demand of water are not suitable for Indian conditions.

**Statement (II) :**

Kuichling's formula estimates lesser value of fire water demand.

88. **Statement (I) :**

For the design of slender column, additional moments are required to be considered.

**Statement (II) :**

Lateral deflection of slender columns, under axial load, is substantial and causes additional moments.

89. **Statement (I) :**

To achieve maximum value for minimum radius of gyration of compression members without increasing the area of the section, a number of elements are placed away from the principal axis using suitable lateral systems.

**Statement (II) :**

Batten shall be placed at  $40^\circ$  to  $70^\circ$  to the axis of built-up members.

90. **Statement (I) :**

Chain surveying is that type of surveying in which only linear measurements are made in the field.

**Statement (II) :**

Traversing is that type of survey in which a number of connected survey lines from the framework and the directions and lengths of the survey lines are measured with the help of an angle measuring instrument and a tape respectively.

91. Stirrup area in excess of that required for shear and torsion is provided along each terminated bar over a distance from the cut-off point equal to

- (a) three-fourth the effective depth of the member.
- (b) one-third the effective depth of the member.
- (c) two-third the effective depth of the member.
- (d) one-fourth the effective depth of the member.

92. Which one of the following is **not** a type of mortar?

- (a) Lime surkhi mortar
- (b) Cement sand mortar
- (c) Cement stone chips mortar
- (d) Cement lime mortar

93. The grade of concrete and reinforcement are M-20 and Fe-250 respectively. Consider 25 mm diameter bars and  $\tau_{bd}$  is 1.2. What is the development length at support for a simply supported beam of a rectangular section?

- (a) 1133 mm
- (b) 1033 mm
- (c) 1321 mm
- (d) 1232 mm

94. In a singly reinforced beam, for given grade of concrete, permissible bond stress in deformed bars

- (a) is lesser than that of plain bars.
- (b) is equal to that of plain bars.
- (c) may be greater than or smaller than that of plain bars.
- (d) is greater than that of plain bars.

95. The safe load carried by the helically reinforced column is

- (a) 1.05 times the load carried by the similar column with ties.
- (b) 2.15 times the load carried by the similar column with ties.
- (c) 1.15 times the load carried by the similar column with ties.
- (d) 2.05 times the load carried by the similar column with ties.

96. Nominal cover to reinforcement is provided to

1. protect reinforcement against corrosion.
2. provide shear resistance.
3. protect reinforcement against fire.
4. develop sufficient bond strength along surface area of reinforcement bars.

Which of the above statements are correct?

- (a) 1 and 4 only
- (b) 2, 3 and 4 only
- (c) 1, 3 and 4 only
- (d) 1, 2 and 3 only



97. In slab design, ratio of maximum diameter of reinforcing bars to the total thickness of slab should **not** be more than
- 1/12
  - 1/6
  - 1/8
  - 1/7
98. To prevent cracking of edges, the corners in two way slabs are provided with
- shear reinforcement
  - torsion reinforcement
  - tensile reinforcement
  - compression reinforcement
99. Critical section for two way shear in case of isolated footing design is at
- the face of column.
  - effective depth from the face of column.
  - half of the effective depth from the face of column.
  - two-third of the effective depth from the face of column.
100. Accepted relationship between tread and riser in case of staircase design is
- Riser  $\times$  Tread = 60,000 mm<sup>2</sup>
  - 2  $\times$  Riser + Tread = 600 mm
  - Riser + Tread = 600 mm
  - 2  $\times$  Tread + Riser = 600 mm
101. Loss of pre-stress is **not** directly related to
- creep of concrete.
  - shrinkage of concrete.
  - grade of concrete.
  - slipping of steel tendons from concrete.
102. Which one of the following statements is the disadvantage of post-tensioning method ?
- The loss of pre-stress is less as compared to pre-tensioning system.
  - Post-tensioning method is costly as compared to pre-tensioning method.
  - Post-tensioning can be done in factories and at the site also.
  - Post-tensioning method is used for large spans and heavily loaded structures.
103. What is the main limitation of bar chart ?
- It does not help in material and labour planning.
  - It does not show all the activities of a project.
  - It does not indicate critical activities of a project.
  - Project duration cannot be estimated.
104. Graders are **not** suitable for
- levelling of earthwork.
  - cutting ditches.
  - working on steeper slopes.
  - heavy excavation.
105. Line of Balance technique is
- modified bar chart.
  - planning of repetitive activities of a project.
  - modified form of PERT.
  - used for planning milestones of a project.

106. A 1.4 m long laminated carriage spring has leaves of 100 mm width and 10 mm thickness. The spring has to absorb 125 N-m of energy when straightened, without exceeding the bending stress of 160 MPa. What is the number of leaves? (Take the elastic modulus of material of spring as 200 GPa)
- 11
  - 9
  - 7
  - 5
107. A wooden floor is required to carry a load of  $12 \text{ kN/m}^2$  and is to be supported by wooden joists of  $120 \text{ mm} \times 250 \text{ mm}$  in section over a span of 4 m. If the bending stress in these wooden joists is not to exceed 8 MPa, what is the spacing of the joists?
- 356 mm
  - 318 mm
  - 432 mm
  - 417 mm
108. A motor driving a solid circular shaft transmits 30 kW at 500 r.p.m. What is the torque activity on the shaft, if allowable shear stress is 42 MPa?
- 427 Nm
  - 573 Nm
  - 180 Nm
  - 219 Nm
109. An open-coiled helical spring of wire diameter 12 mm, mean coil radius 84 mm, helix angle  $60^\circ$  carries an axial load of 480 N. What is the twisting moment?
- 10.22 Nm
  - 20.16 Nm
  - 14.24 Nm
  - 24.11 Nm
110. The stresses at a point of a machine component are 150 MPa and 50 MPa, both tensile. What is the intensity of normal stress on a plane inclined at an angle of  $30^\circ$  with the axis of major tensile stress?
- 25 MPa
  - 50 MPa
  - 75 MPa
  - 100 MPa
111. In case of lintel design, the load enclosed in an equilateral triangle is fully transferred to the lintel provided the height of wall above lintel is
- not less than 1.25 times the height of the equilateral triangle.
  - less than twice the height of the equilateral triangle.
  - less than 1.25 times the height of the equilateral triangle.
  - greater than twice the height of the equilateral triangle.



112. Consider the following statements for Euler's equation to find critical load of a column :

1. Critical load of a column is proportional to the flexural rigidity.
2. Critical load of a column depends upon yield stress.
3. Critical load of a column is inversely proportional to the length of column.
4. Critical load of a column is inversely proportional to the square of the length of column.

Which of the above statements are correct ?

- (a) 1 and 2 only
- (b) 1 and 4 only
- (c) 2 and 3 only
- (d) 2 and 4 only

113. A steel plate 120 mm wide and 20 mm thick is bent into a circular arc of radius 10 m. What is the maximum stress produced and the bending moment which can produce this stress respectively ? (Take  $E = 200 \text{ GPa}$ )

- (a) 100 MPa, 32 kN-m
- (b) 200 MPa, 160 N-mm
- (c) 200 MPa, 1600 N-m
- (d) 20 MPa, 160 kN-m

114. Consider the following statements regarding shearing force and bending moment :

1. Point of contraflexure is the point where bending moment changes its sign.
2. Shear force is the rate of change of bending moment.
3. For bending moment to be the maximum or minimum, shear force should change its sign.
4. Rate of change of loading is equal to shear force.

Which of the above statements are correct ?

- (a) 2 and 3 only
- (b) 1 and 4 only
- (c) 1, 2 and 4 only
- (d) 1, 2 and 3 only

115. Consider the following statements :

Moment Area Method proves advantageous in analyzing

1. cantilever beams.
2. symmetrically loaded simply supported beams.
3. fixed beams.
4. continuous beams.

Which of the above statements are correct ?

- (a) 1, 2 and 4 only
- (b) 3 and 4 only
- (c) 1, 2 and 3 only
- (d) 1 and 2 only

116. Consider the following statements regarding continuous beam :

1. A beam is said to be a continuous beam if it is supported on more than two supports.
2. A continuous beam is a statically indeterminate structure.
3. The degree of indeterminacy depends upon the number of supports and also on the nature of the supports.

Which of the above statements are correct ?

- (a) 1 and 2 only
- (b) 2 and 3 only
- (c) 1, 2 and 3
- (d) 1 and 3 only

117. In case of flexural tension or flexural compression, the minimum length of the bar which must be embedded in concrete beyond any section to develop its full strength, is termed as

- (a) Twisted length
- (b) Flexural length
- (c) Bond length
- (d) Development length

118. It is observed experimentally that the amplitude of free vibration of a certain structure modelled as a single degree of freedom system, decreases from 1.0 to 0.4 in 10 cycles. What is the percentage of critical damping ?

(Take  $\ln 2 = 0.693$  and  $\ln 10 = 2.303$ )

- (a) 5.21%
- (b) 1.46%
- (c) 2.37%
- (d) 3.22%

119. The ultimate tensile strain in steel is in the range of

(a) 0.012 - 0.020

(b) 0.0012 - 0.0020

(c) 0.12 - 0.20

(d) 0.00012 - 0.00020

120. Consider the following statements regarding statically determinate structures :

1. Conditions of equilibrium are sufficient to fully analyse the structure.

2. The bending moment at a section or the force in any member is independent of the material of the components of the structure.

3. The bending moment at a section or the force in any member is independent of the cross-sectional areas of the components.

Which of the above statements are correct ?

(a) 1 and 2 only

(b) 2 and 3 only

(c) 1, 2 and 3

(d) 1 and 3 only



121. The chemical composition 'Silicates of iron and alumina' is found in which one of the following minerals ?

- (a) Garnet
- (b) Serpentine
- (c) Olivine
- (d) Calcite

122. The drawback of electric seasoning of timber is

- (a) Checks
- (b) Splitting
- (c) Cracks
- (d) Reduced Strength

123. Which one of the following is a product obtained by distilling tar and is used largely as an effective preservative for wood ?

- (a) Creosote
- (b) Solignum
- (c) Coal tar
- (d) Wax polish

124. Pozzolanas are

- (a) argillaceous materials
- (b) calcareous materials
- (c) accelerators
- (d) siliceous materials

125. For better chemical resistance, proportion of which one of the following compounds in cement clinker shall be increased ?

- (a) Tricalcium Silicate
- (b) Dicalcium Silicate
- (c) Tetracalcium Aluminate
- (d) Tetracalcium Aluminoferrite

126. The finishing coat in X-ray room walls is done preferably with

- (a) Barium plaster
- (b) Cement plaster
- (c) Gypsum
- (d) Plaster of Paris

127. The most suitable type of cement for mass concreting works is

- (a) Rapid Hardening Cement
- (b) High Alumina Cement
- (c) Low Heat Portland Cement
- (d) Quick Setting Cement

128. Which one of the non-destructive tests can be performed on fresh concrete ?

- (a) Ultrasonic test
- (b) Penetration test
- (c) Core test
- (d) Hammer test

129. In a concrete mix, for given cement content and workability, higher proportion of fine aggregate will be required if

- (a) maximum size of aggregate is large.
- (b) maximum size of aggregate is small.
- (c) rounded aggregate is used.
- (d) all in aggregate is used.

130. A central steel rod 18 mm diameter passes through a copper sleeve with 24 mm inside and 39 mm outside diameter. It is provided with nuts and washers at each end and the nuts are tightened until a stress of  $10 \text{ N/mm}^2$  is set up in the steel. Then, the stress developed in copper tube is

- (a)  $29.1 \text{ N/mm}^2$ , Compressive
- (b)  $3.4 \text{ N/mm}^2$ , Compressive
- (c)  $3.4 \text{ N/mm}^2$ , Tensile
- (d)  $29.1 \text{ N/mm}^2$ , Tensile

131. A 2 m long alloy bar of  $1500 \text{ mm}^2$  cross-sectional area hangs vertically and has a collar securely fixed at its lower end. What is the stress induced in the bar when a weight of 2 kN falls from a height of 100 mm on the collar? (Take  $E = 120 \text{ GPa}$ )

- (a) 126.5 MPa
- (b) 158.3 MPa
- (c) 161.2 MPa
- (d) 181.3 MPa

132. Normal stresses of  $126 \text{ MN/m}^2$  (Tensile) and  $94 \text{ MN/m}^2$  (Compressive) are acting at a point in an elastic material at right angles to each other. If the maximum principal stress is limited to  $146 \text{ MN/m}^2$ , the shear stress that may be allowed at that point in the same plane is


- (a)  $170 \text{ MN/m}^2$
- (b)  $89 \text{ MN/m}^2$
- (c)  $69 \text{ MN/m}^2$
- (d)  $96 \text{ MN/m}^2$

$$\left(\frac{\sigma_x + \sigma_y}{2}\right) \cos 2\theta + \left(\frac{\sigma_x - \sigma_y}{2}\right) \sin 2\theta$$

$$50 \times \cos 30^\circ + \frac{100}{2} + 25 \times \sin 30^\circ$$

133. A plane element in a body is subjected to a tensile stress of 100 MPa and shear stress of 25 MPa. What is the normal stress on a plane inclined at  $15^\circ$  with the tensile stress?

- (a) -5.8 MPa
- (b) -4.8 MPa
- (c) -3.8 MPa
- (d) -2.8 MPa

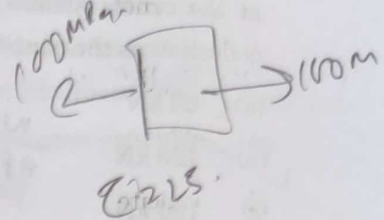

134. A load of 2100 N is dropped axially on a closed-coiled helical spring from a height of 240 mm. The spring has 22 coils each of mean diameter 180 mm and wire diameter is 25 mm. If modulus of rigidity  $C = 84000 \text{ N/mm}^2$  and amount of compression  $\delta = 255 \text{ mm}$ , what is the maximum shear stress produced in the spring?

- (a)  $156 \text{ N/mm}^2$
- (b)  $346 \text{ N/mm}^2$
- (c)  $239 \text{ N/mm}^2$
- (d)  $123 \text{ N/mm}^2$

135. An I-section purlin of span 4 m is subjected to a total uniformly distributed load of 5 kN. The purlin will be designed for maximum bending moment of

- (a) 2000 Nm
- (b) 20 kNm
- (c) 2500 Nm
- (d) 25 kNm



136. A cantilever beam of 4 m span carries a UDL of 3 kN/m over its entire span and a point load of 3 kN at the free end. If the same beam is simply supported at two ends, what point load at the centre should it carry to have same deflection as the cantilever?

- (a) 60 kN  
 (b) 120 kN  
 (c) 160 kN  
 (d) 210 kN

$$\frac{wL^4}{8EI} + \frac{PL^3}{3EI} = \frac{PL^3}{48EI}$$

$$\frac{3 \times 4^4}{8} + \frac{3 \times 4^3}{3} = \frac{P \times 4^3}{48}$$

137. A beam AB of span 5 m fixed at both ends carries a UDL of 12 kN/m over the whole span. If the right end B settles down by 12 mm, what are the end moments for the beam? (Take  $EI = 15000 \text{ kNm}^2$ )

- (a)  $M_a = 68.2 \text{ kNm}$  (hogging) and  $M_b = 18.2 \text{ kNm}$  (sagging)  
 (b)  $M_a = 18.2 \text{ kNm}$  (hogging) and  $M_b = 68.2 \text{ kNm}$  (sagging)  
 (c)  $M_a = 68.2 \text{ kNm}$  (hogging) and  $M_b = 68.2 \text{ kNm}$  (sagging)  
 (d)  $M_a = 18.2 \text{ kNm}$  (hogging) and  $M_b = 18.2 \text{ kNm}$  (sagging)

Handwritten calculations for Q137:  
 $\frac{6EI\Delta}{L^2} = \frac{3 \times 12 \times 5^3}{8 \times 15000}$   
 $\Delta = 12 \text{ mm}$   
 $M_a = 68.2 \text{ kNm}$   
 $M_b = 18.2 \text{ kNm}$

138. A cable is suspended between two points, 75 m apart horizontally with its left end lower than the right end by 10 m. The cable supports a UDL of 5 kN/m along the horizontal span. What is the horizontal tension in the cable if central sag is 7.5 m?

- (a) 385.13 kN  
 (b) 468.75 kN  
 (c) 145.15 kN  
 (d) 528.62 kN

FGT-B-CVL




139. Consider the following statements related to merits of construction in structural steel:

- Structural steel has high strength per unit weight as compared to RCC.
- The steel members are slender or small in size as compared to RCC.
- The steel structures are useful in construction of tall buildings, long-span bridges and airplane hangars.


Which of the above statements are correct?

- (a) 1 and 2 only  
 (b) 2 and 3 only  
 (c) 1, 2 and 3  
 (d) 1 and 3 only





140. For a laced column, the minimum width of the lacing bars when using 20 mm nominal diameter rivets is

- (a) 65 mm  
 (b) 60 mm  
 (c) 55 mm  
 (d) 50 mm

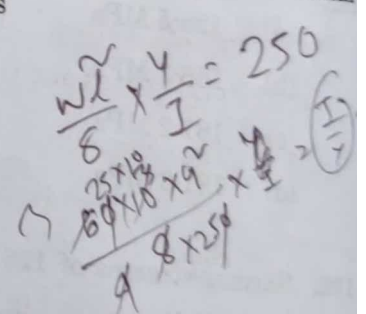

141. A beam simply supported over an effective span of 9 m, carries a uniformly distributed load of 60 kN/m, inclusive of its own weight. What is the section modulus of the beam, if  $f_y = 250 \text{ N/mm}^2$  and  $E = 2 \times 10^5 \text{ N/mm}^2$ ? (Assume width of support is 200 mm)

- (a)  $2612 \times 10^3 \text{ mm}^3$   
 (b)  $3682 \times 10^3 \text{ mm}^3$   
 (c)  $4682 \times 10^3 \text{ mm}^3$   
 (d)  $5124 \times 10^3 \text{ mm}^3$

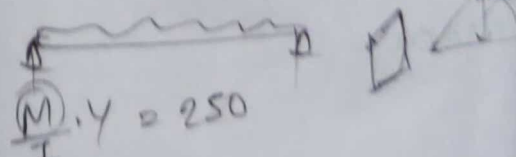

142. Consider the following statements related to batten plates :

1. These normally consist of flat plates, connecting the components of the built-up columns in two parallel planes.
2. These are used for triaxial loading.
3. The design of battened columns and the design of battens are usually governed by IS code requirements.

Which of the above statements are correct ?

- (a) 1 and 3 only
- (b) 2 and 3 only
- (c) 1, 2 and 3
- (d) 1 and 2 only

143. Consider the following statements related to design of tension member with single structural shapes and plates :

1. The common single structural shapes are angle sections, tee sections and channel sections.
2. Single angles are not used for bracing, for light truss tension members.
3. Occasionally, I sections are also used as tension members as they have more rigidity.

Which of the above statements are correct ?

- (a) 1 and 3 only
- (b) 2 and 3 only
- (c) 1 and 2 only
- (d) 1, 2 and 3

144. Consider the following statements regarding the advantages of a good organization :

1. It increases cooperation and a feeling of freedom.
2. It prevents duplication of work.
3. It makes communication easier.
4. It increases the likelihood of run-arounds.

Which of the above statements are correct ?

- (a) 1, 2 and 3 only
- (b) 2, 3 and 4 only
- (c) 1, 3 and 4 only
- (d) 1, 2 and 4 only

145. For design of a roof truss, if the design wind velocity is 20 m/s, what is the design wind pressure ?

- (a) 400 N/m<sup>2</sup>
- (b) 240 N/m<sup>2</sup>
- (c) 40 N/m<sup>2</sup>
- (d) 200 N/m<sup>2</sup>

146. Consider the following statements :

1. The working stress design is based on explicit consideration of the various conditions under which the structure may cease to fulfil its intended function.
2. In case of working stress design, structure will directly take into consideration the various relevant modes of failure.
3. In working stress method, regulatory bodies or classification societies usually specify the value of the allowable stress as some fraction of the mechanical properties of materials.

Which of the above statements is/are correct ?

- (a) 1 and 2 only
- (b) 2 only
- (c) 2 and 3 only
- (d) 3 only




147. Consider the following statements regarding the working stress design method :

1. Working stress design is based on the elastic theory.
2. The working stress in the member should be less than the permissible stress.
3. The permissible stress is the ratio of the factor of safety to the yield stress.
4. The permissible stresses for fasteners are usually based on the ultimate strength of the connection.

Which of the above statements is/are **not** correct ?

- (a) 1 and 3 only
- (b) 3 only
- (c) 4 only
- (d) 2 and 4 only



148. A steel cantilever beam is proposed to build into a concrete wall at one end and other end is free. It supports a dead load of 20 kN/m and a live load of 10 kN/m. The length of the beam is 5 m. What are the shear force and bending moment respectively ? (Take yield strength of steel as 250 N/mm<sup>2</sup>)

- (a) 225 kN and 562.5 kNm
- (b) 22.5 kN and 56.25 kNm
- (c) 225 kN and 56.25 kNm
- (d) 22.5 kN and 562.5 kNm

225 95  
/ 5

149. Consider the following for local capacity of section :

1. Local section failure is usually encountered in the case of short stocky beam-columns with relatively smaller axial compression ratio and beam-columns bent in reverse curvature.
2. The strength of end section reached under combined axial force and bending, governs the failure.
3. The strength of the section may be governed by plastic buckling of plate elements in the case of plastic, compact and semi-compact sections.

Which of the above statements are correct ?

- (a) 1 and 2 only
- (b) 2 and 3 only
- (c) 1, 2 and 3
- (d) 1 and 3 only

150. A tension member of a roof truss carries a factored load of 430 kN. By considering the strength in yield, what is the gross area required to carry this load ? (Consider Fe 250 grade steel)

- (a) 1892 mm<sup>2</sup>
- (b) 1978 mm<sup>2</sup>
- (c) 1903 mm<sup>2</sup>
- (d) 2150 mm<sup>2</sup>

430 + 50  
150